

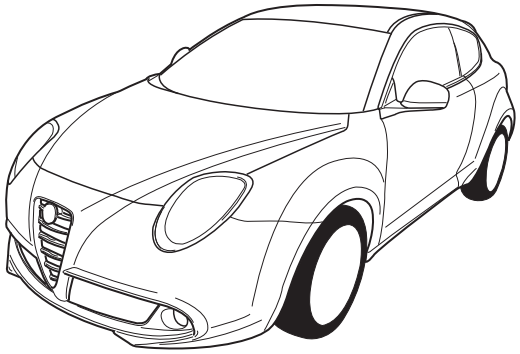


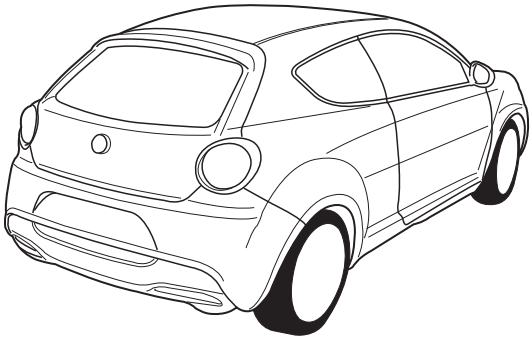

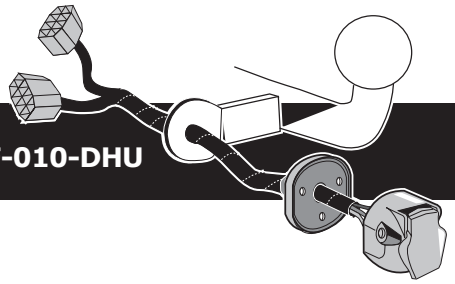

Alfa Romeo MiTo 2008-

Partnr.: AF-010-DHU

• Fitting instructions electric wiring kit tow bar with 13-P socket up to DIN/ISO Norm 11446.

• We would expressly point out that assembly not carried out properly by a competent installer will resultin cancellation of any right to damage compensation, in particular those arising by virtue of the product liability act.

• Contents of these kits and their fitting manuals are subject to alteration without notice, please ensure that these instructions are read and fully understood before commencing installation.


• Do not overload circuits; the maximum loads per connection are detailed in this manual.


• Attention! Before Installation, please read this manual carefully and inform your customer to consult the vehicle owners manual to check for any vehicle modifications required before towing.

• In the event of functional problems, troubleshooting must be limited to about 0.5 hours, contact the technical support: ukts@ecs-electronics.com / 07440 202 052.





Part list

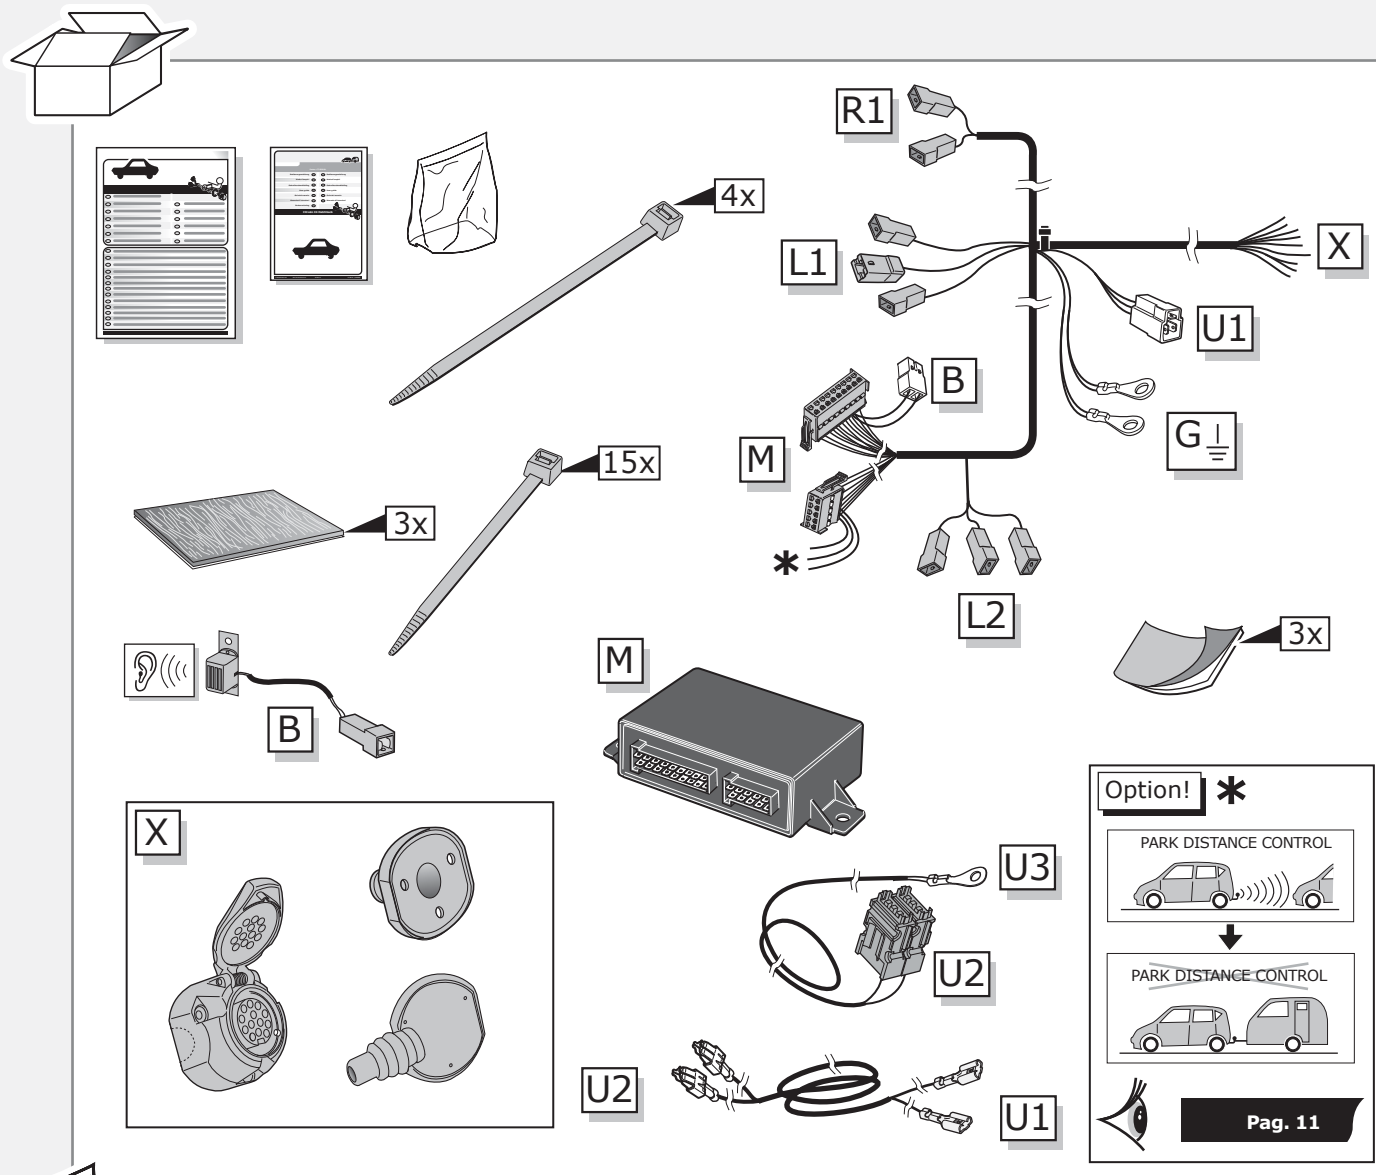
R1
4x
L1
X
U1
B
M
G
15x
3x
L2
3x
B
M
X
U3
U2
U2
U1
Option!
PARK DISTANCE CONTROL
PARK DISTANCE CONTROL
Pag. 11

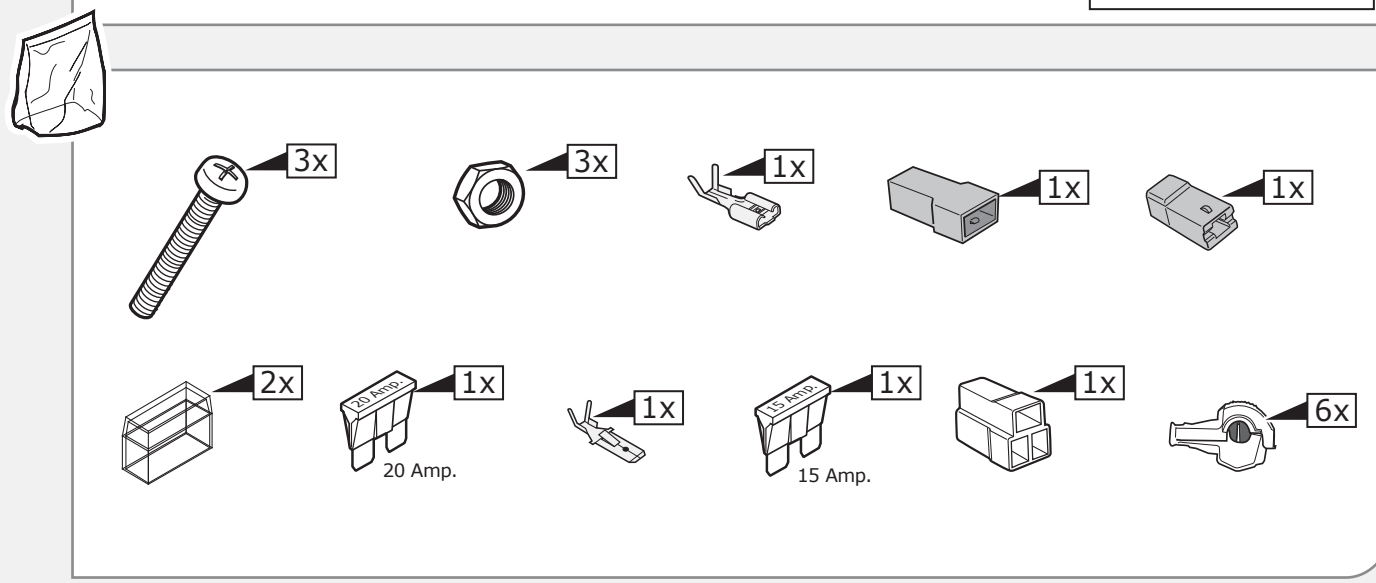

3x
3x
1x
1x
1x
2x
20 Amp.
1x
20 Amp.
1x
15 Amp.
1x
15 Amp.
1x
6x

ROUTING

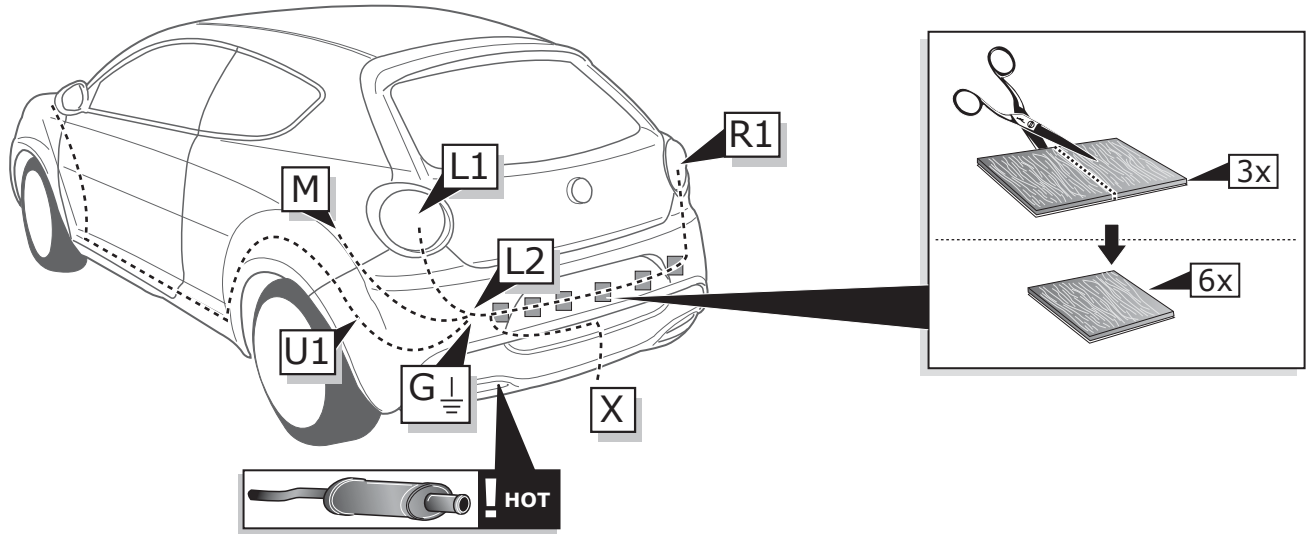


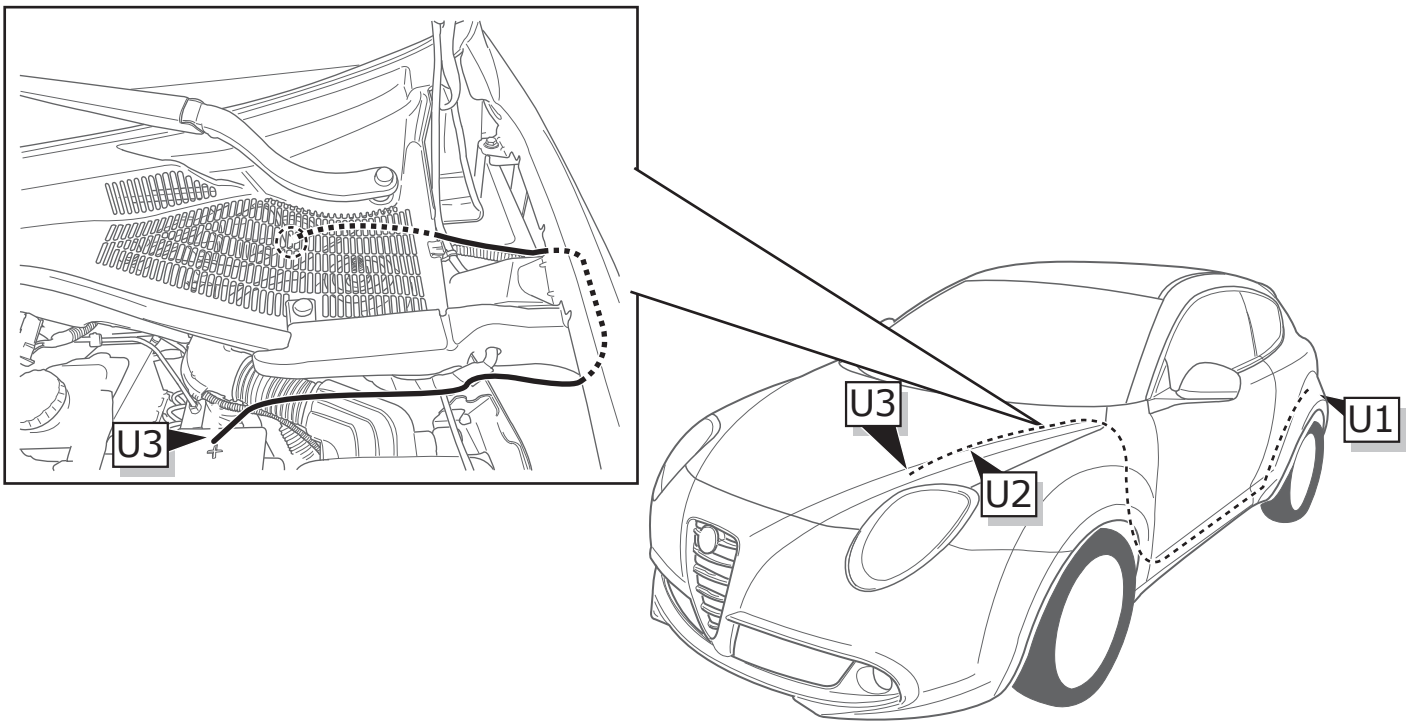


1

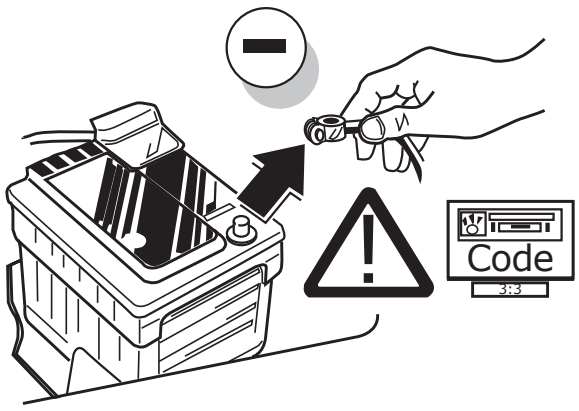


2

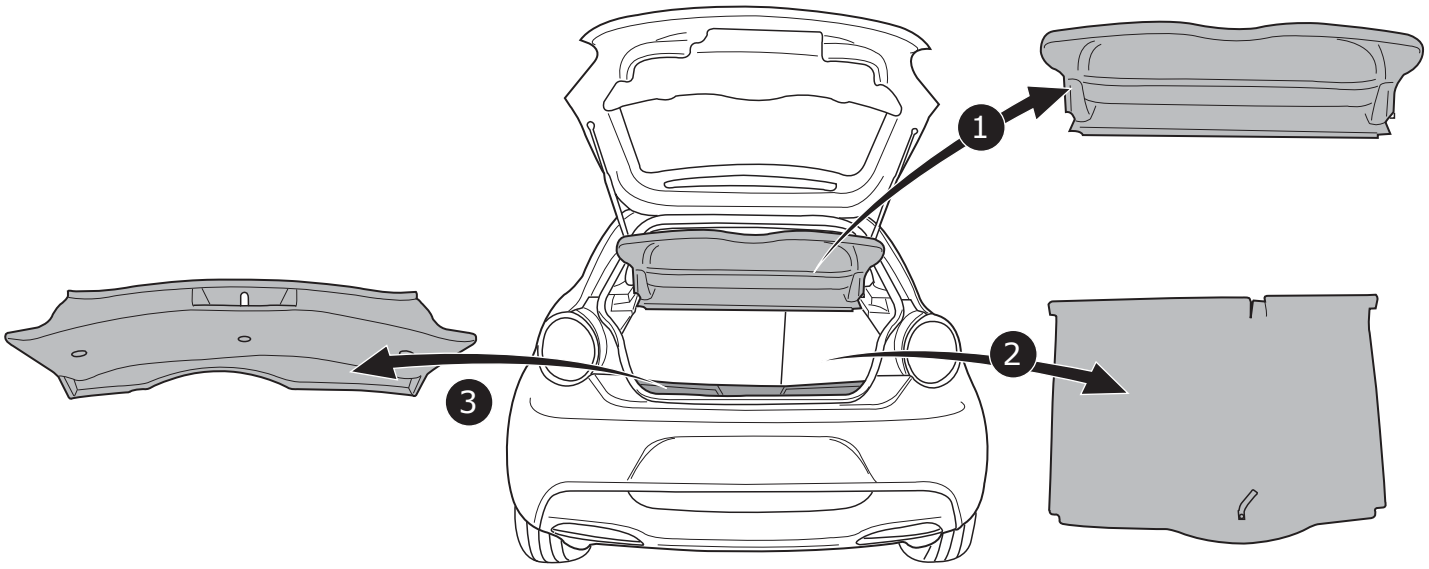



3

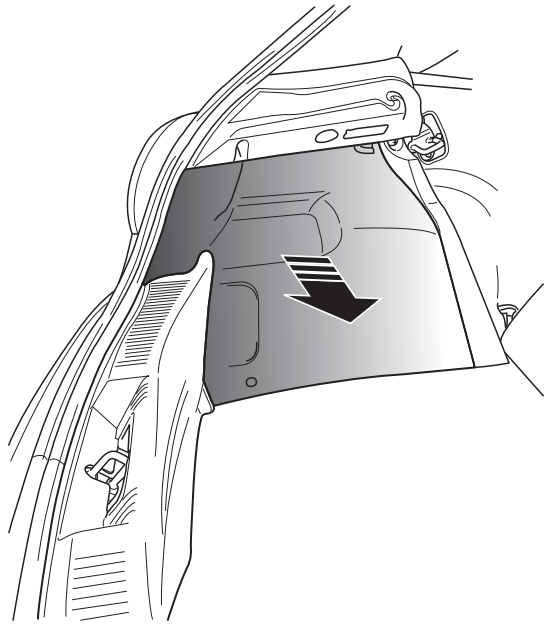

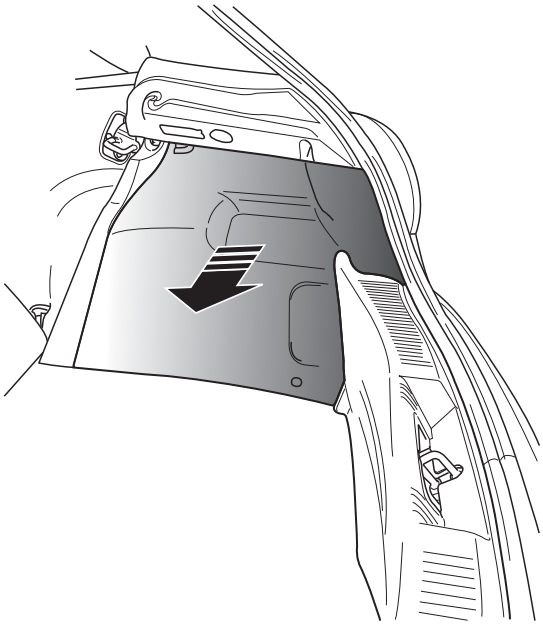


4

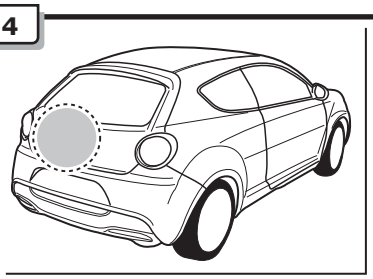

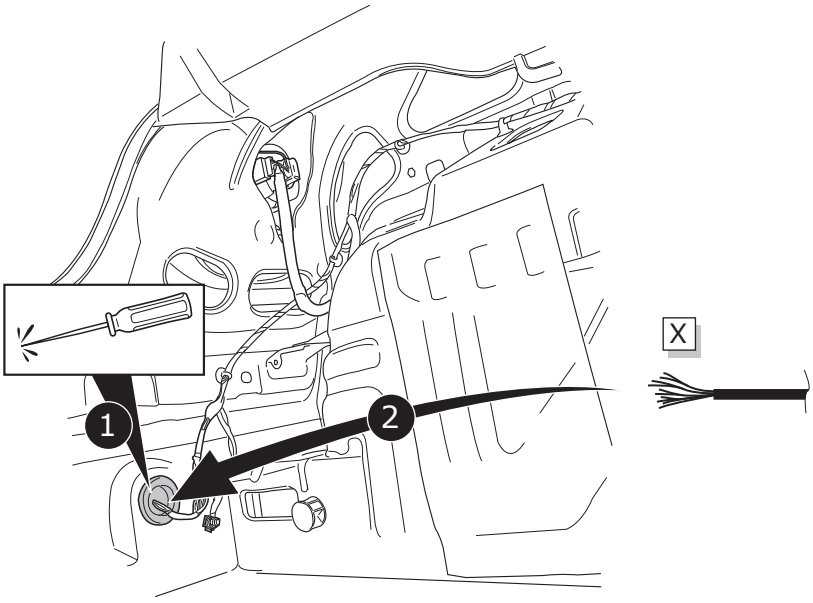


A


Option 1

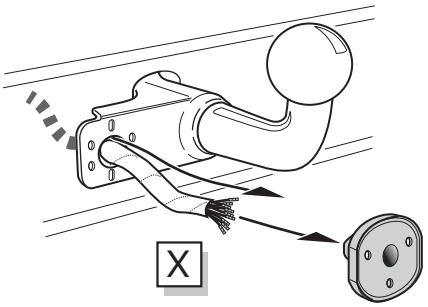

Option 2

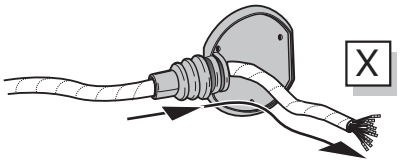

Option 3

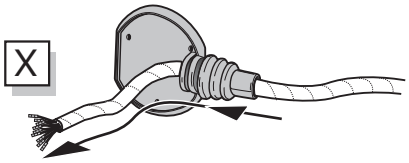


INFO


SOCKET CONNECTION

Pag. 10

B


Option 1

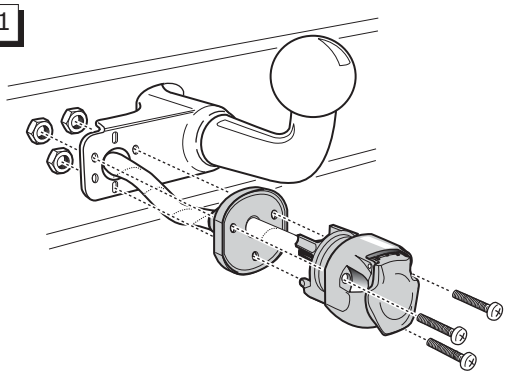


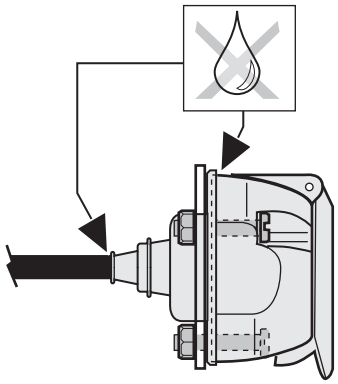



C

Option 2






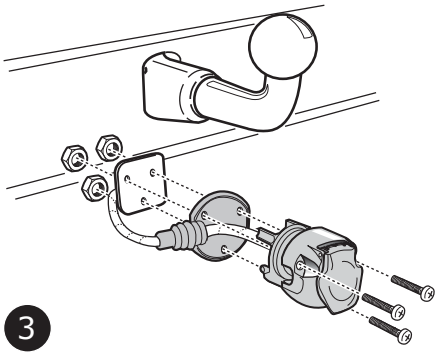






D

Option 3







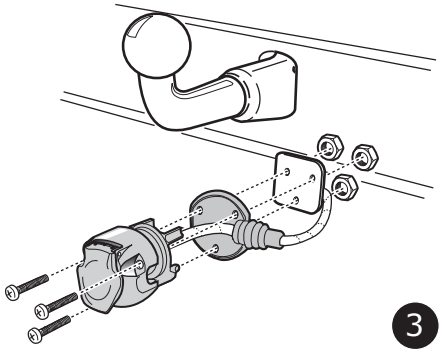




© ECS Electronics B.V.

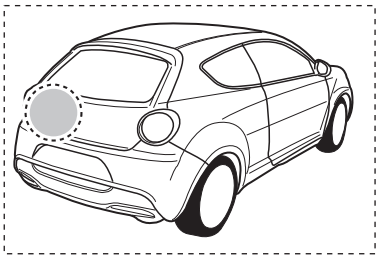


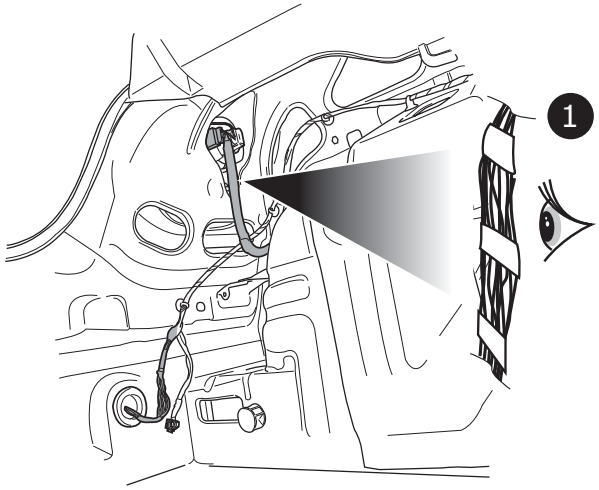






Colours

1 54 STOP	Green/ White	Green/ White	.....
1 58L	Yellow/ Red	Yellow/ Red	.....
1 L	Blue/ White	Blue/ White	.....
2 58R	Yellow/ Black	Yellow/ Black	.....
2 R	Blue/ Black	Blue/ Black	.....
3 Reverse	Grey/ Green	Grey/ Green	.....
3	Brown/ Yellow	Brown/ Yellow	.....

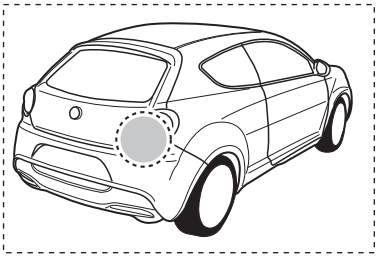

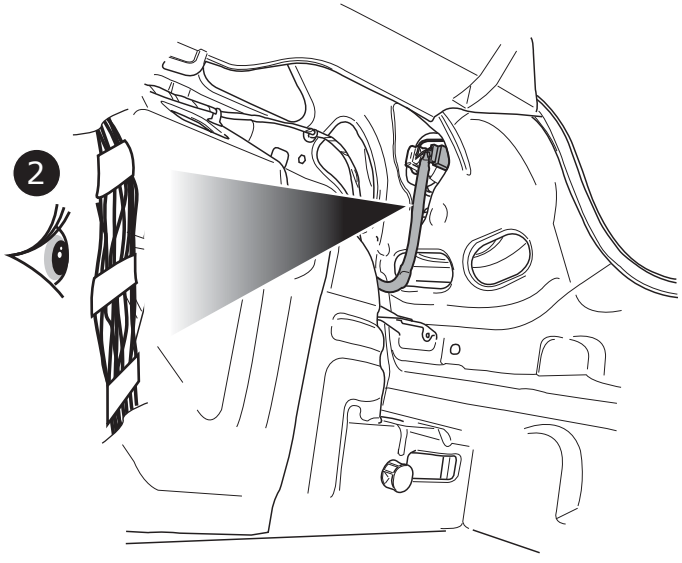


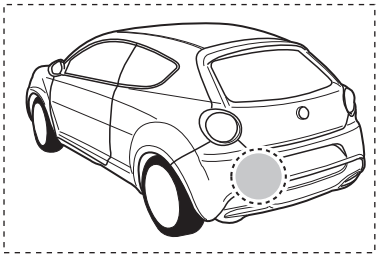


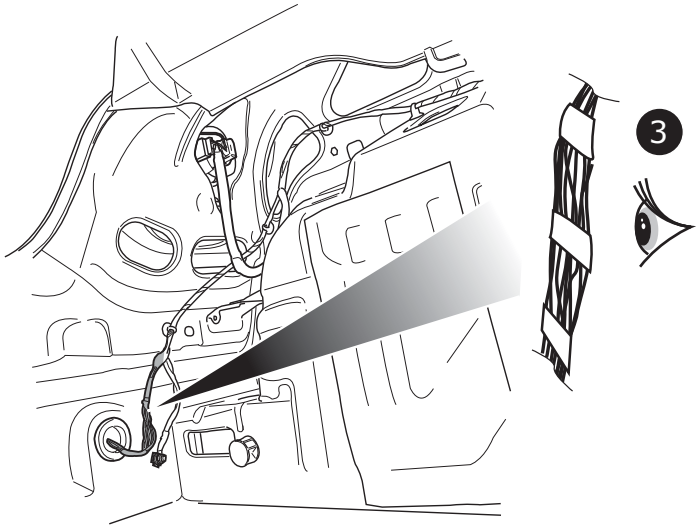



© ECS Electronics B.V.


6

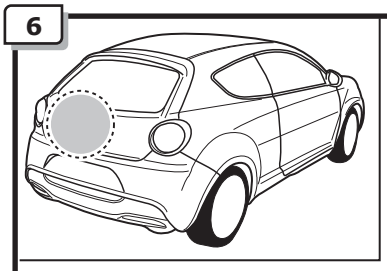

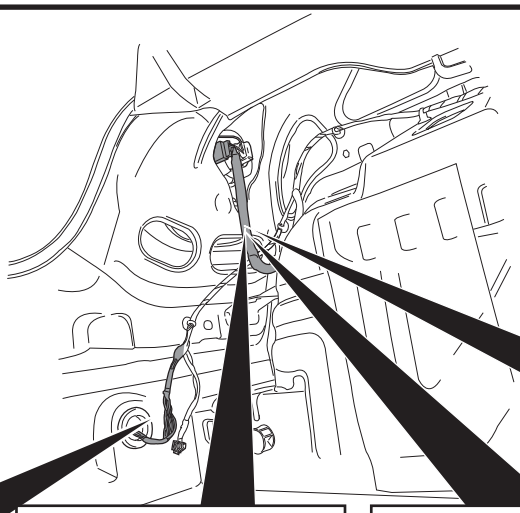




4x
L2
L1



Colours
Pag. 6

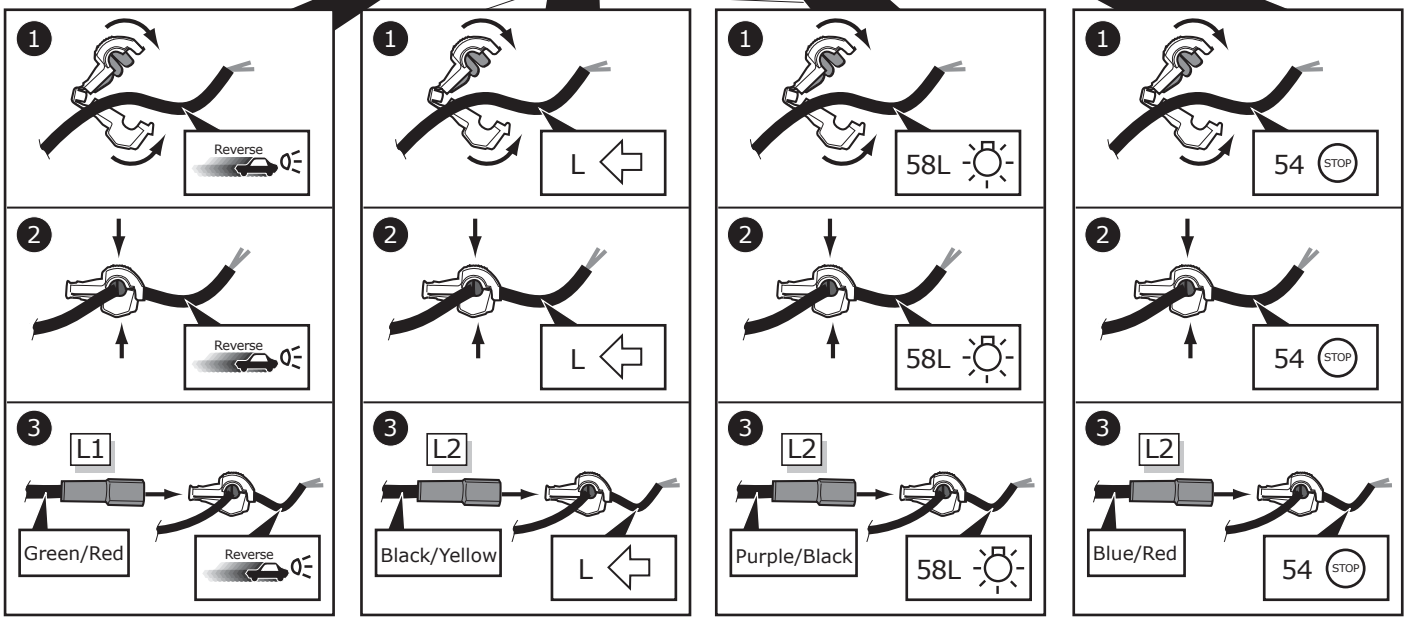

1
Reverse
2
Reverse
3
L1
Green/Red
Reverse
1
L
2
L
3
L2
Black/Yellow
L
1
58L
2
58L
3
L2
Purple/Black
58L
1
54
STOP
2
54
STOP
3
L2
Blue/Red
54
STOP

7

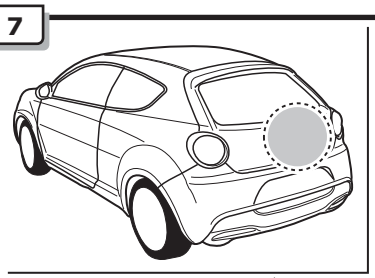




2x
R1



Colours
Pag. 6

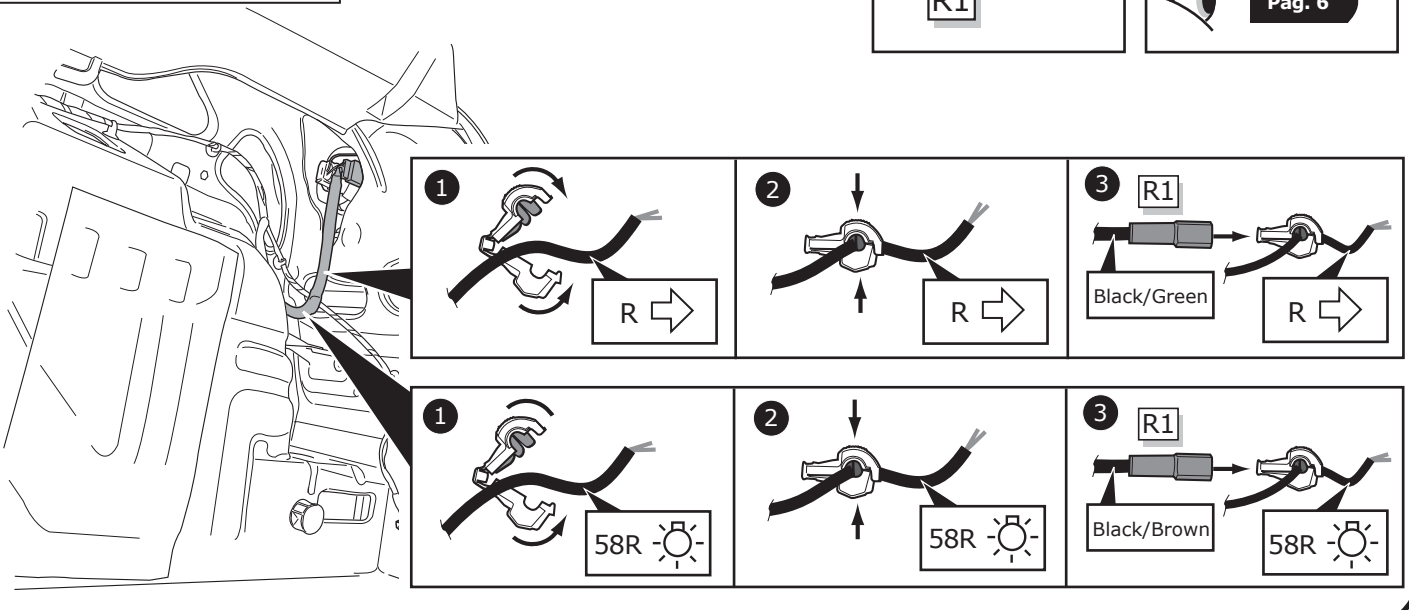

1
R
2
R
3
R1
Black/Green
R
1
58R
2
58R
3
R1
Black/Brown
58R


8

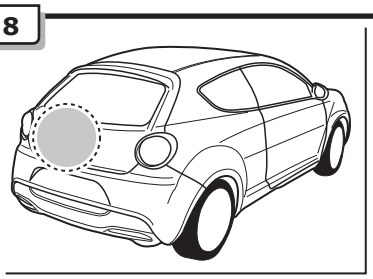


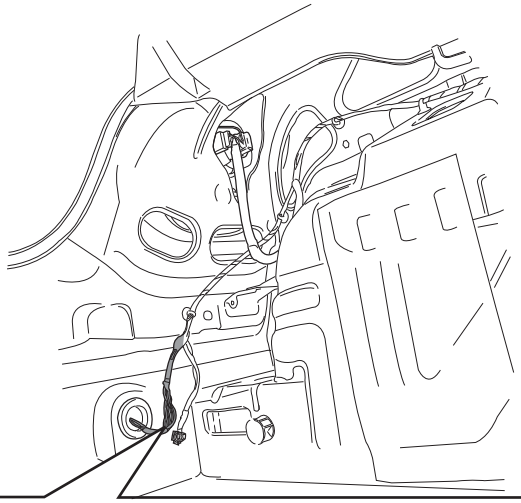






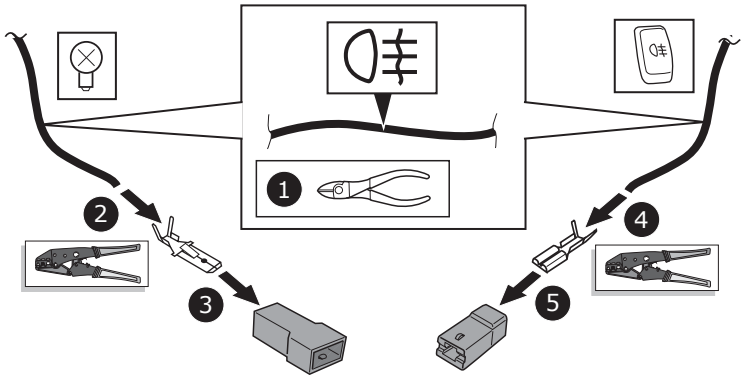


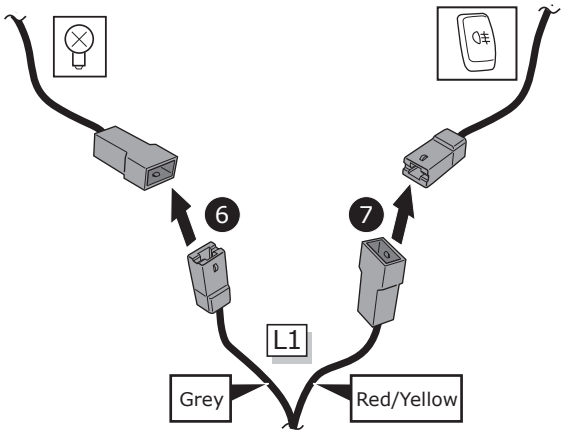

9

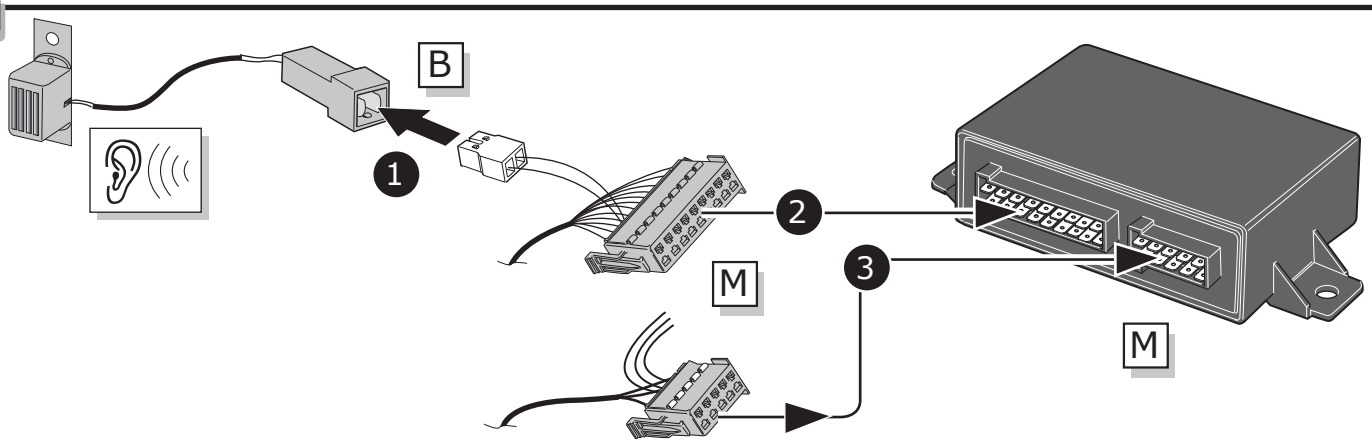


10

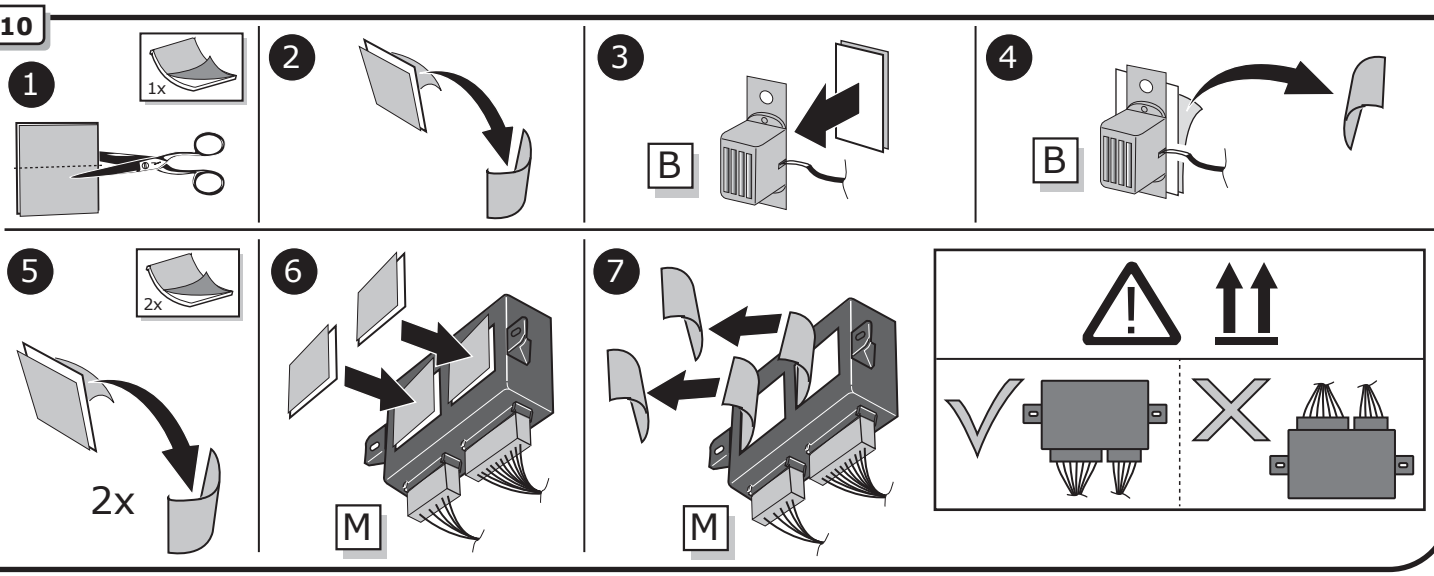



© ECS Electronics B.V.


11

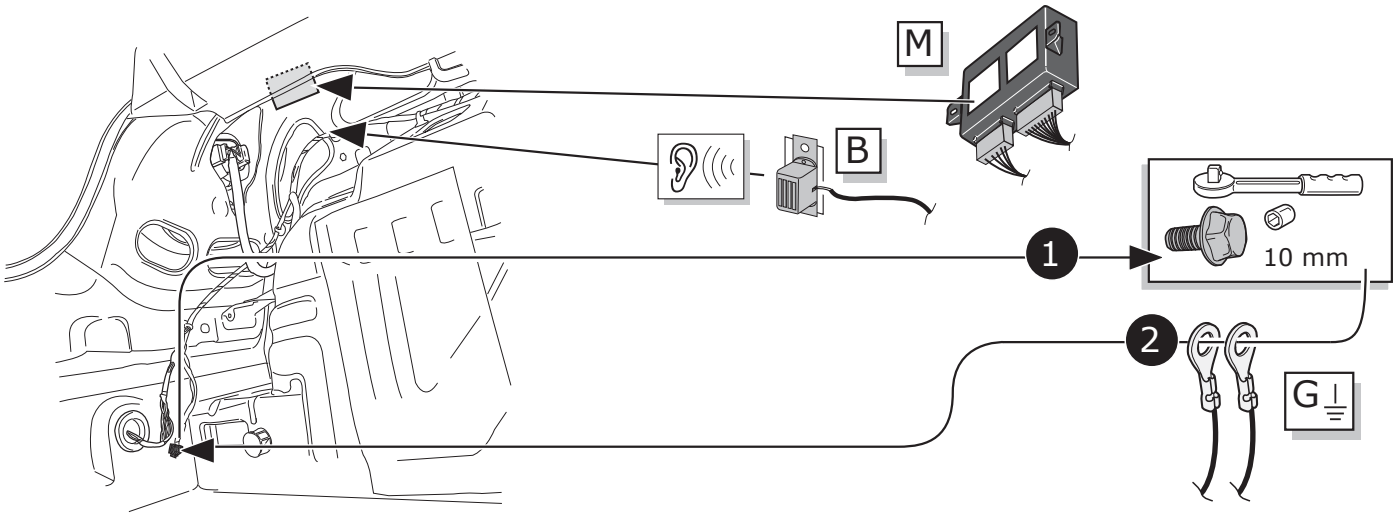

M
B
1
10 mm
2
G

12

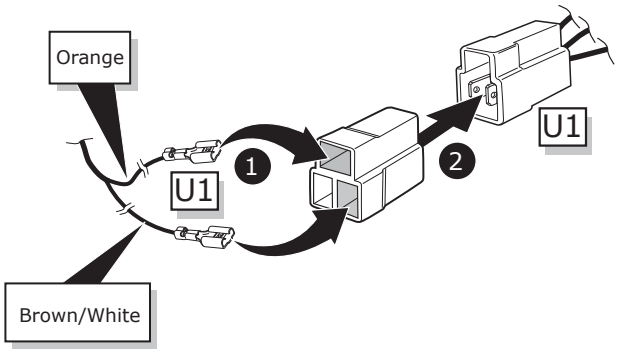

Orange
U1
1
2
U1
Brown/White

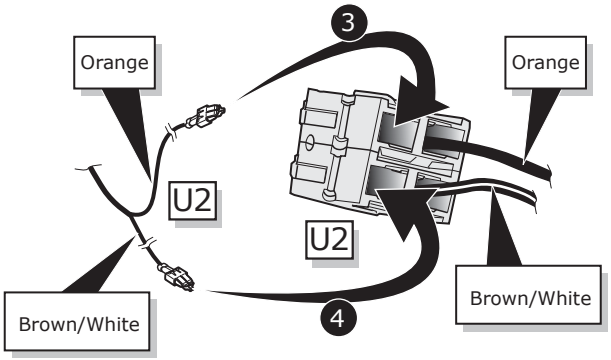
3
Orange
Orange
U2
U2
4
Brown/White
Brown/White

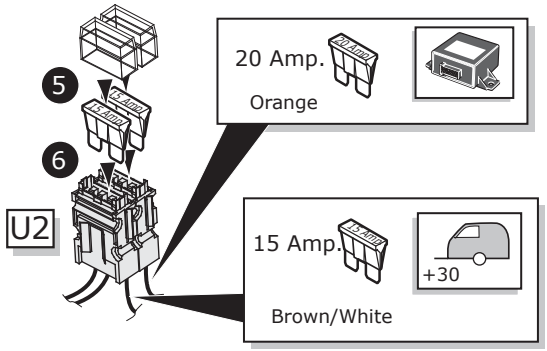
5
6
U2
20 Amp.
Orange
15 Amp.
+30
Brown/White


7
U3

13

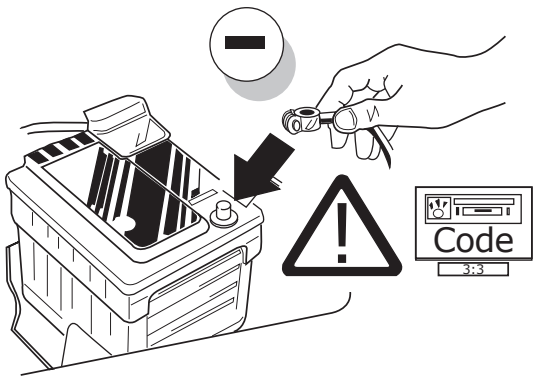
Code
3:3


14

TEST ALL THE CIRCUITS WITH A TEST DEVICE WITH THE CORRECT POWER LOAD FOR EACH FUNCTION. A TEST DEVICE WITH LED'S CANNOT BE USED FOR THIS PURPOSE.

INFO

REINSTALL TRIM.

15

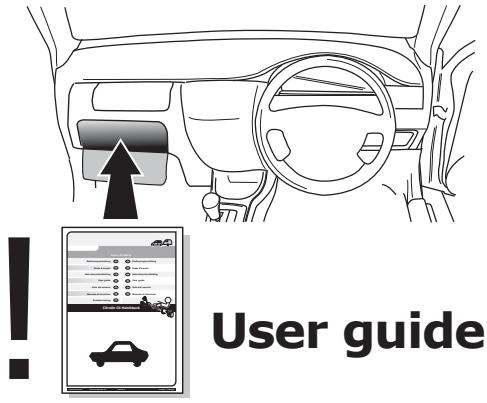


User guide



INFO

SOCKET CONNECTION

DIN/ISO 11446	⇦	1-8	⇨		STOP		Reverse	30+	15+	10	—	9
	1/L	2	3/31	4/R	5/58-R	6/54	7/58-L	8	9	10	11	12	13
Pmax	21W	2x21W		21W	52W	3x21W	52W	2x21W	180W/15Amp	180W/15Amp			
Colour	Yellow	Blue	White	Green	Brown	Red 1,00 mm²	Black	Black/ Red	Brown/ White	Red 2,50 mm²	White	-	White

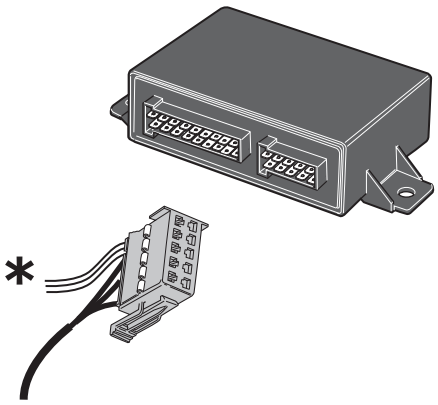


Option




PARK DISTANCE CONTROL



PARK DISTANCE CONTROL




1

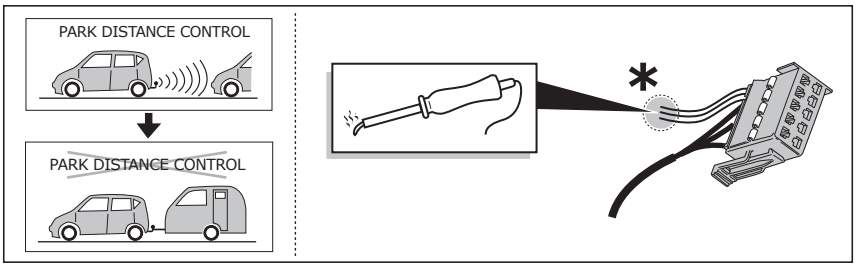


2


Option A

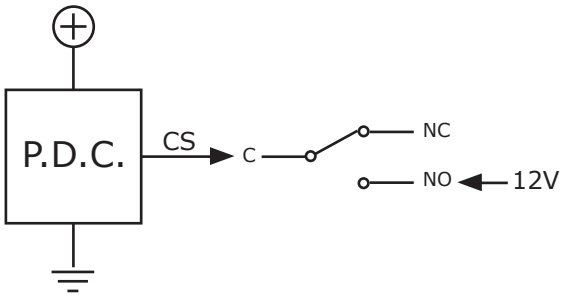



Option B

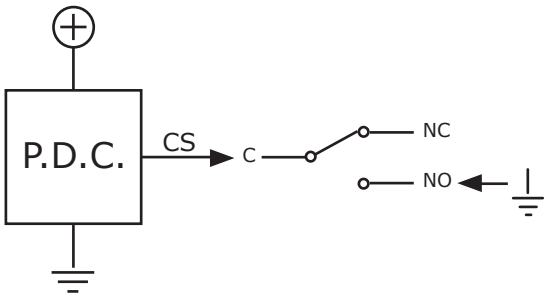

Option C

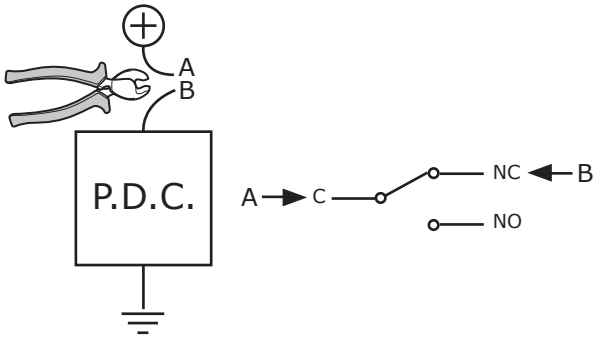



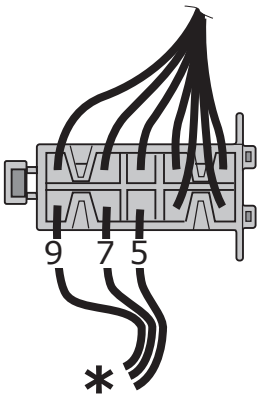

9 = C	7 = NC	5 = NO
Red/Black	Blue/Black	Blue/White