

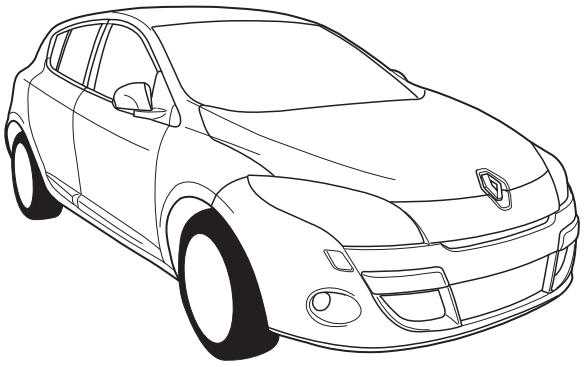


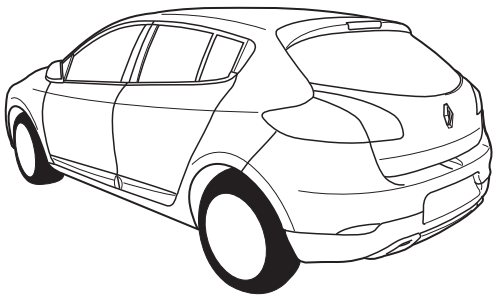

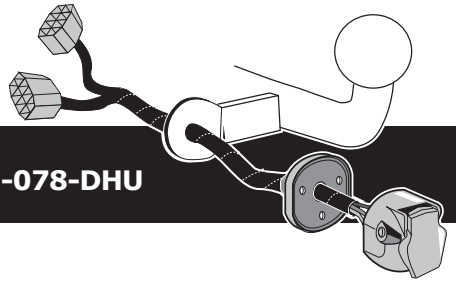

Renault Megane 11/2008-

Partnr.: RN-078-DHU

• Fitting instructions electric wiring kit tow bar with 13-P socket up to DIN/ISO Norm 11446.

• We would expressly point out that assembly not carried out properly by a competent installer will resultin cancellation of any right to damage compensation, in particular those arising by virtue of the product liability act.

• Contents of these kits and their fitting manuals are subject to alteration without notice, please ensure that these instructions are read and fully understood before commencing installation.


• Do not overload circuits; the maximum loads per connection are detailed in this manual.


• Attention! Before Installation, please read this manual carefully and inform your customer to consult the vehicle owners manual to check for any vehicle modifications required before towing.

• In the event of functional problems, troubleshooting must be limited to about 0.5 hours, contact the technical support: t.skinner@ecs-electronics.com / 07440 202 052.




Part list

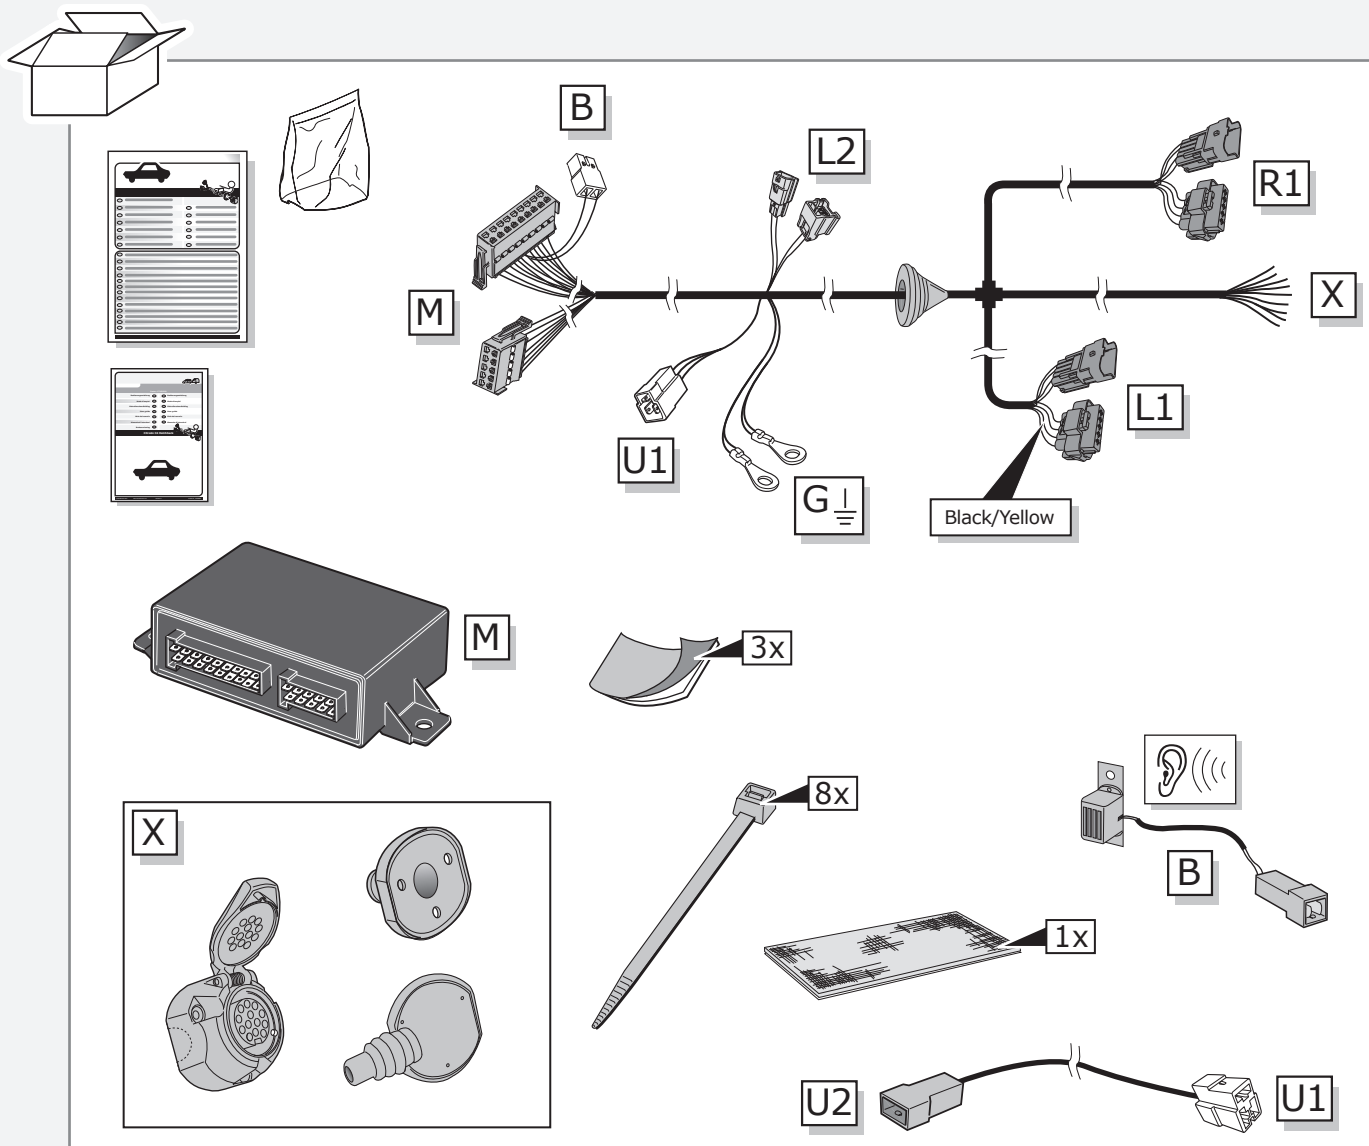

B
L2
R1
M
X
L1
U1
G
Black/Yellow
M
3x
X
8x
B
1x
U2
U1

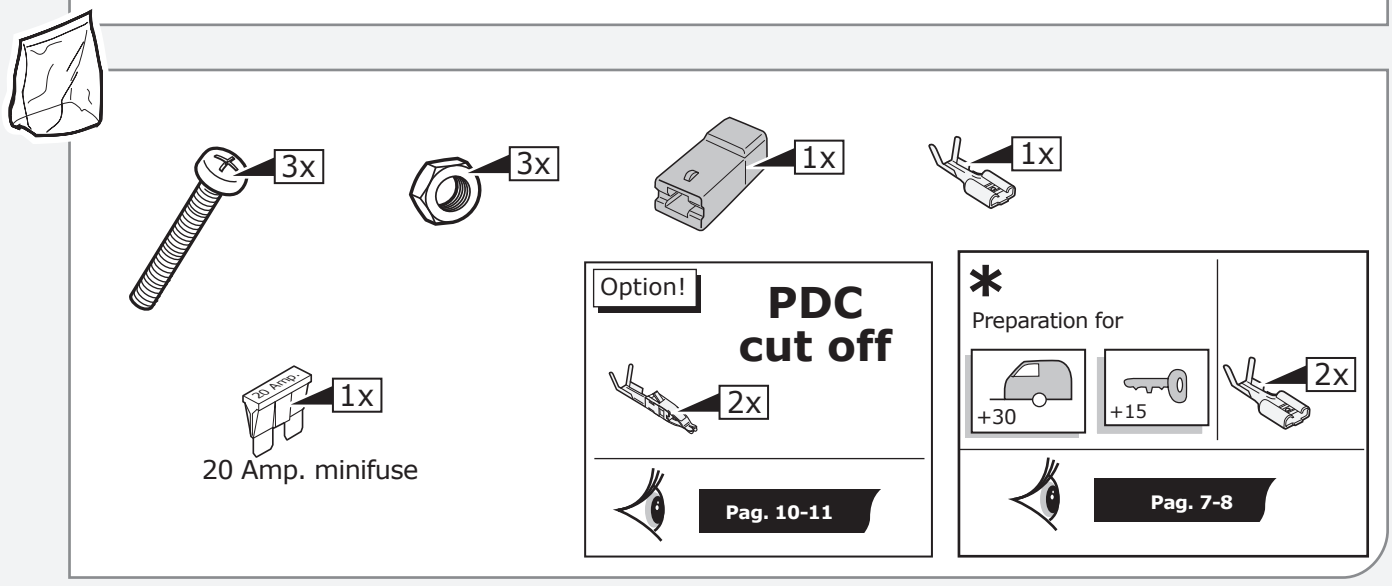
3x
3x
1x
1x
20 Amp
1x
20 Amp. minifuse
Option!
PDC
cut off
2x
Pag. 10-11
*
Preparation for
+30
+15
2x
Pag. 7-8


ROUTING

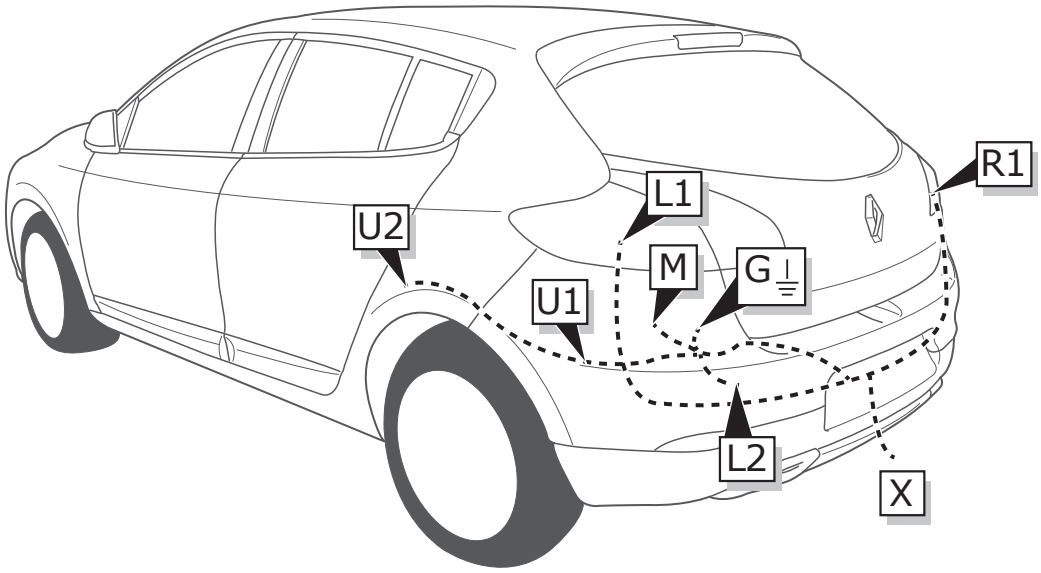


1

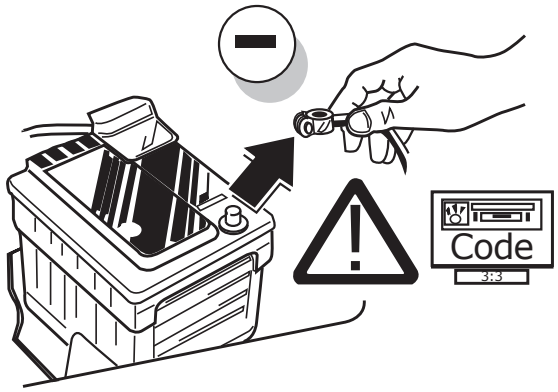


2

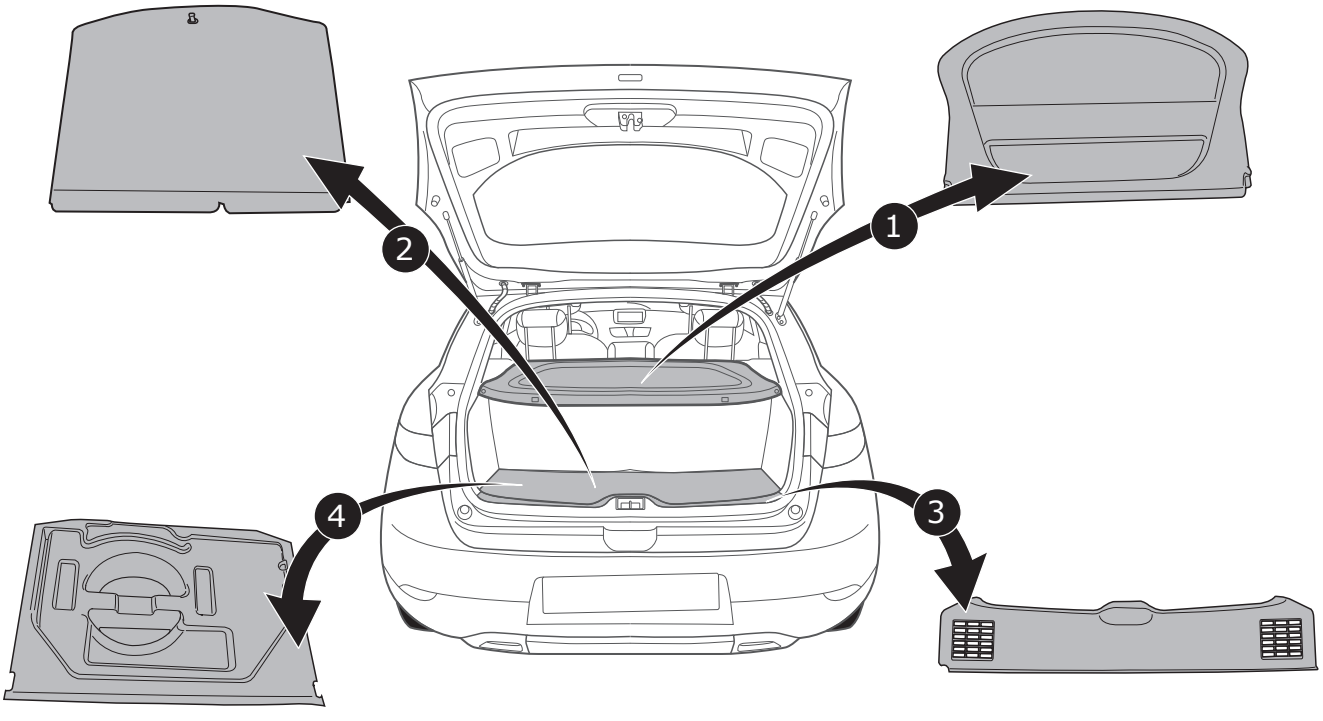


3

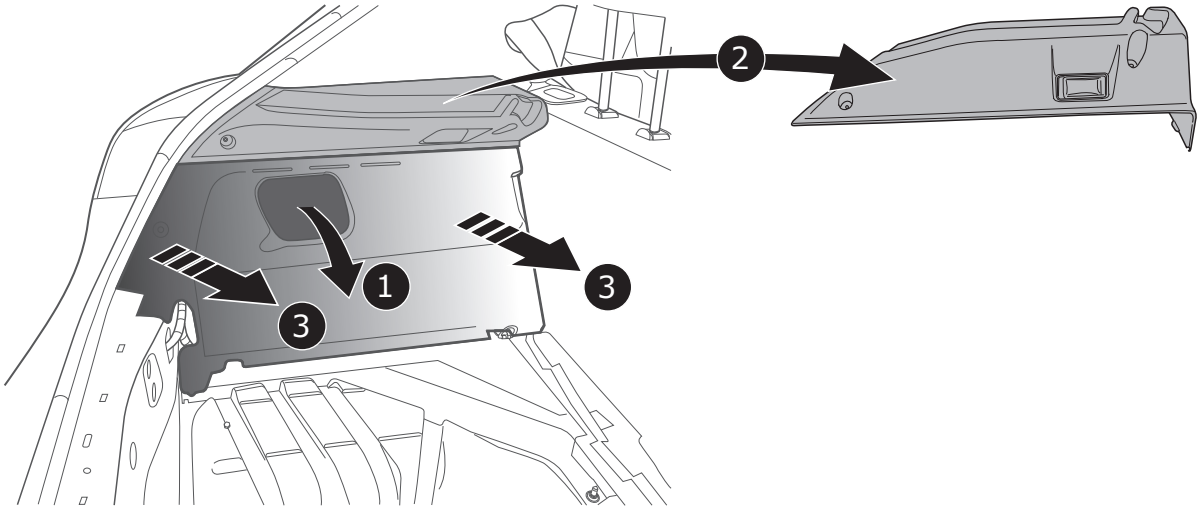

4

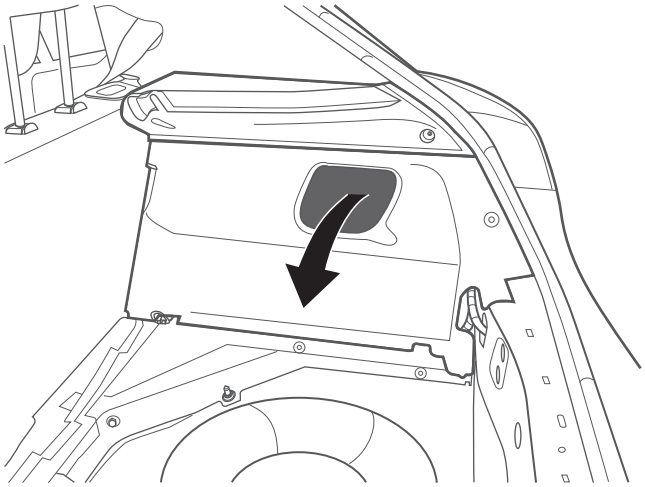


5

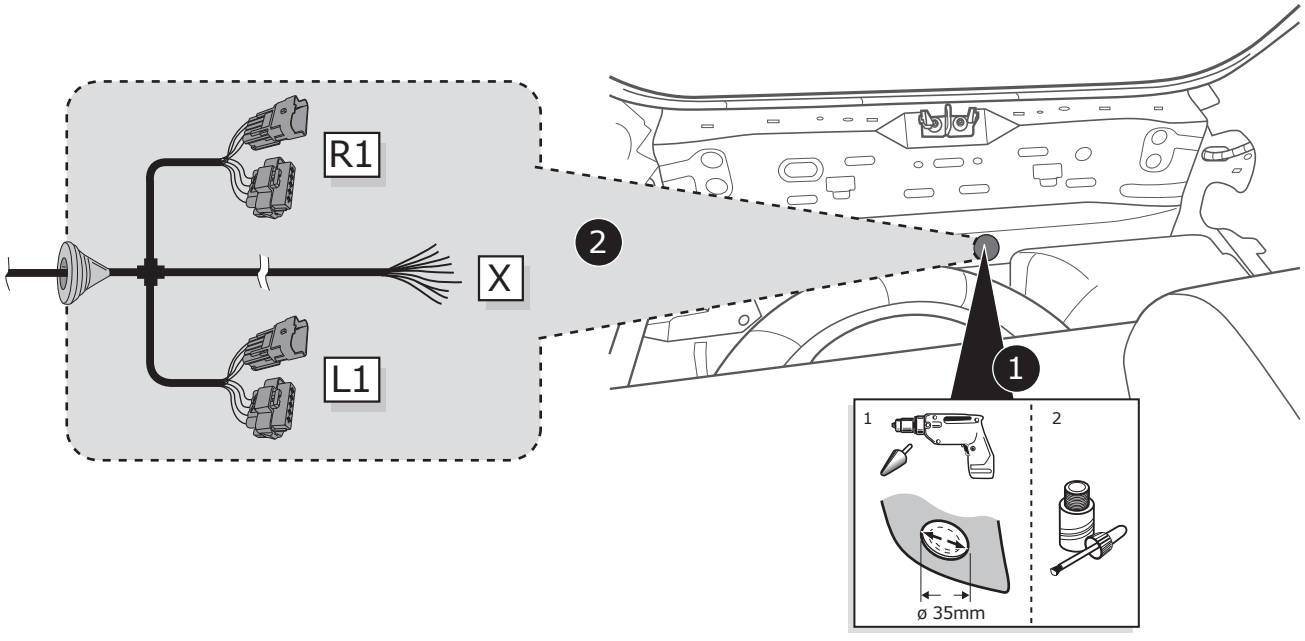


A


Option 1

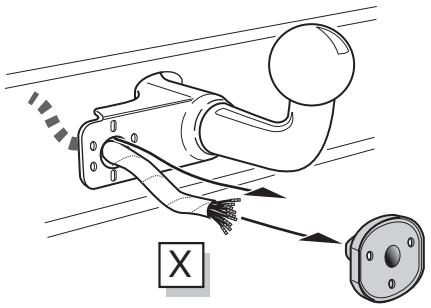

Option 2

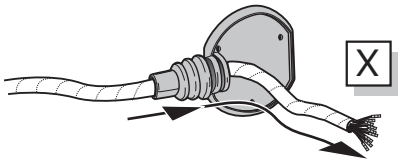

Option 3

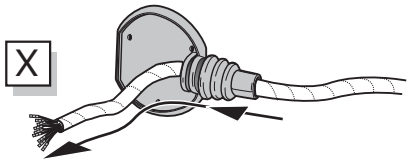


INFO


SOCKET CONNECTION

Pag. 9

B

Option 1

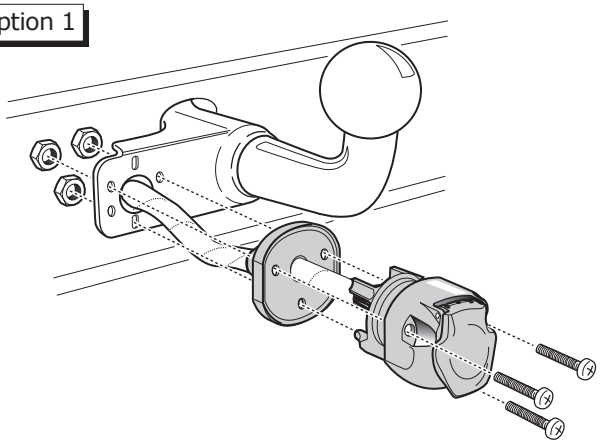


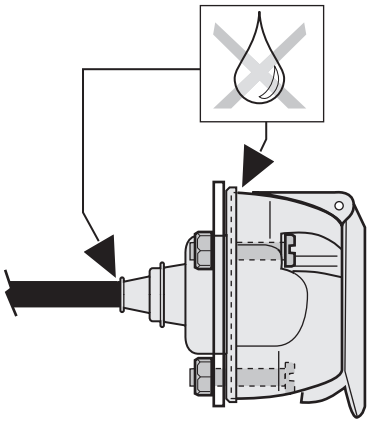


C

Option 2


1




2



3

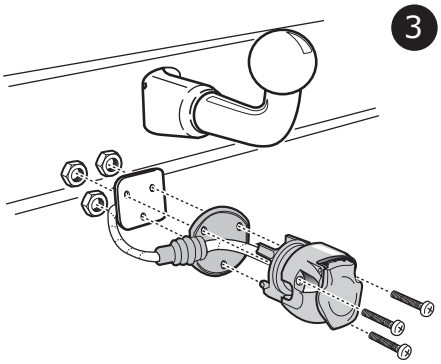


4




D

Option 3


1




2



3

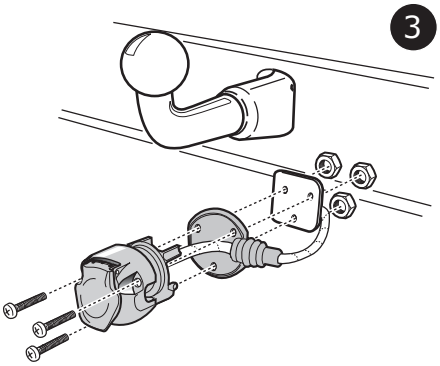


4




© ECS Electronics B.V.


6

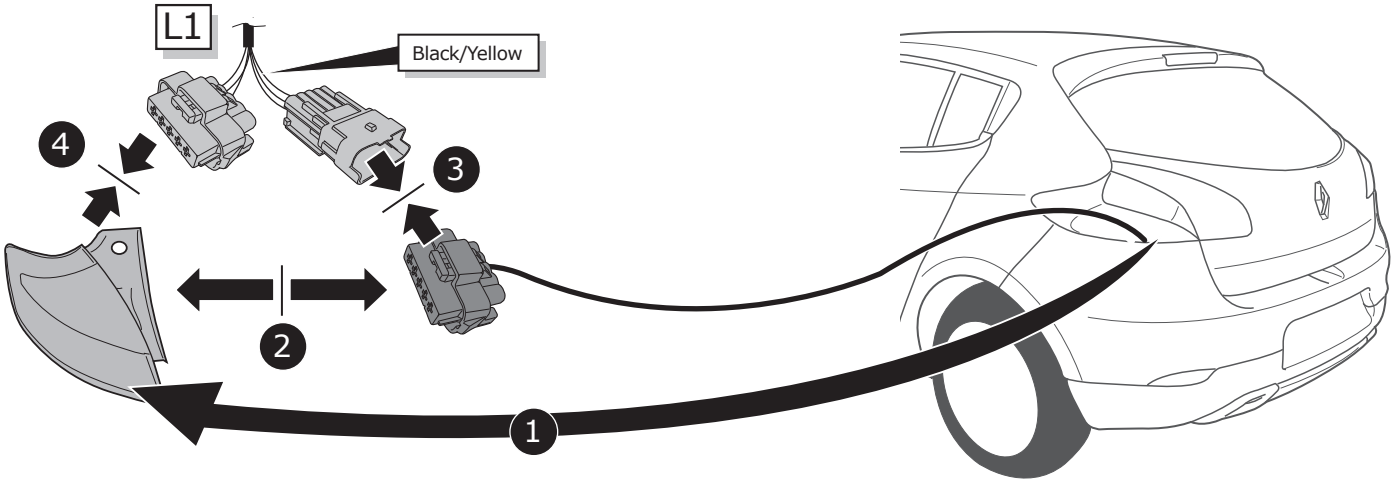


7

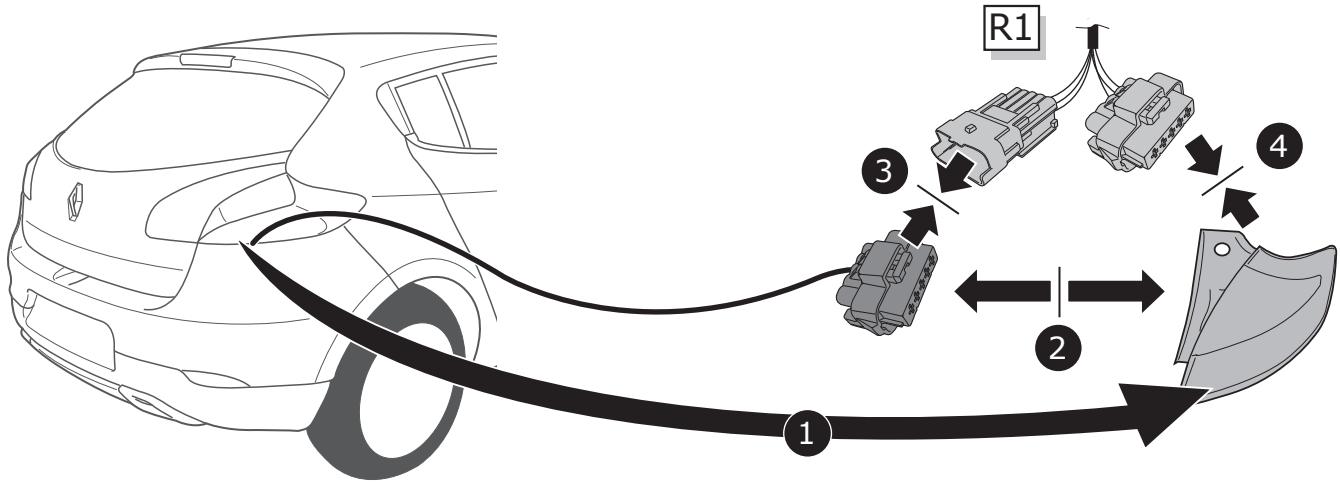


8

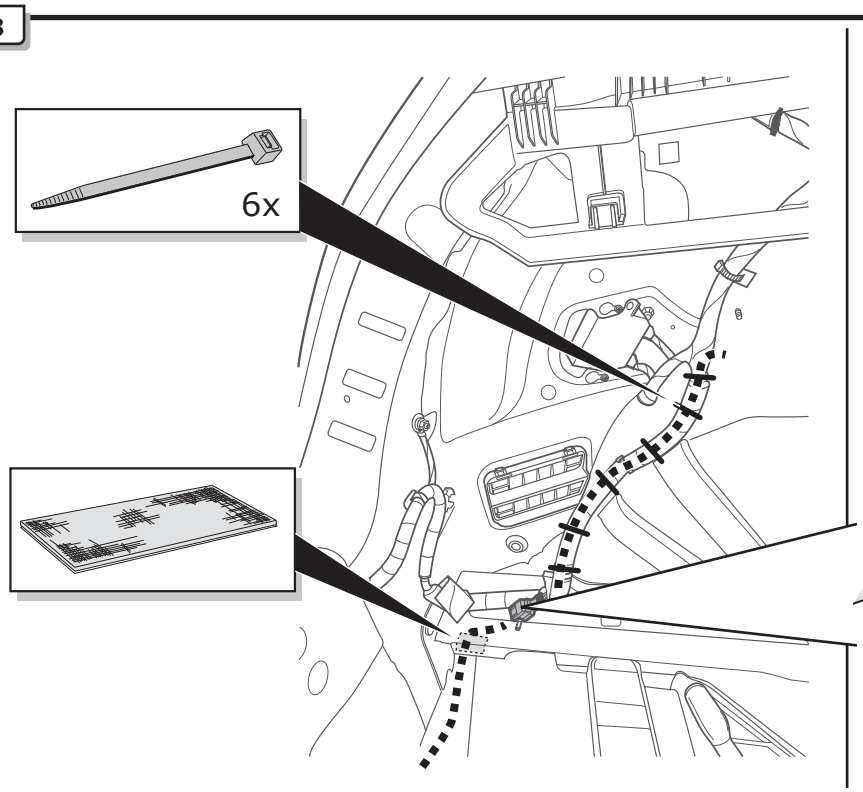


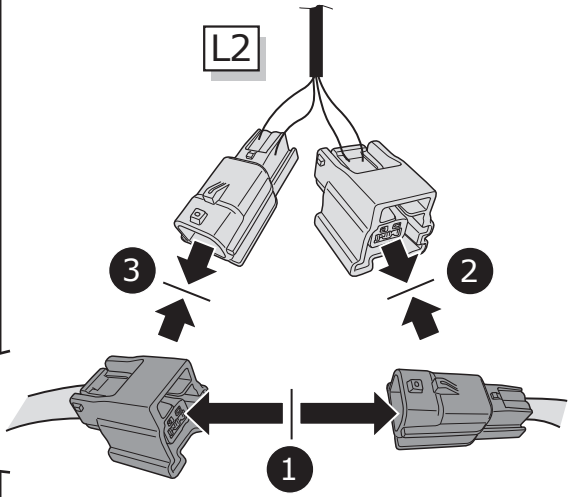


9

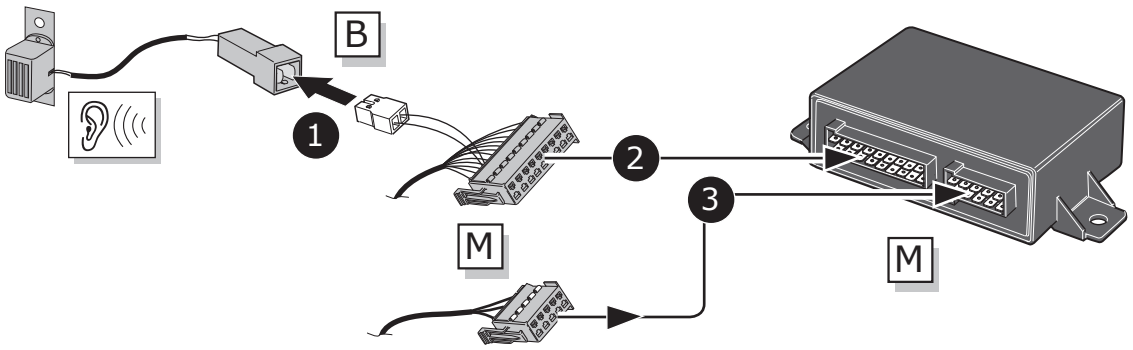
B
1
2
3
M
M

10

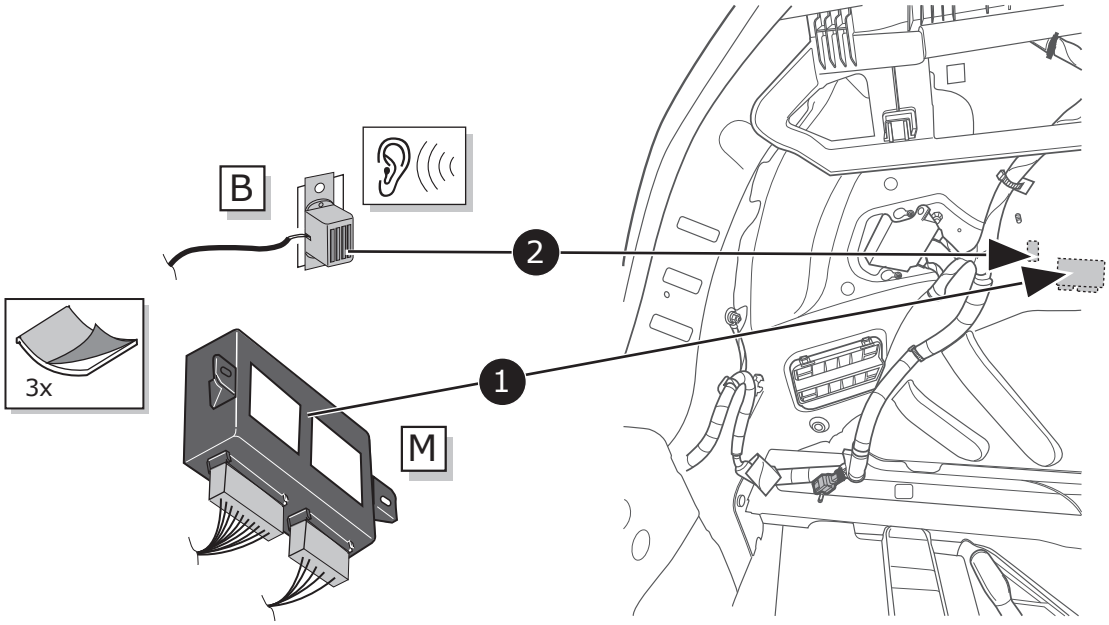

B
2
3x
1
M

11

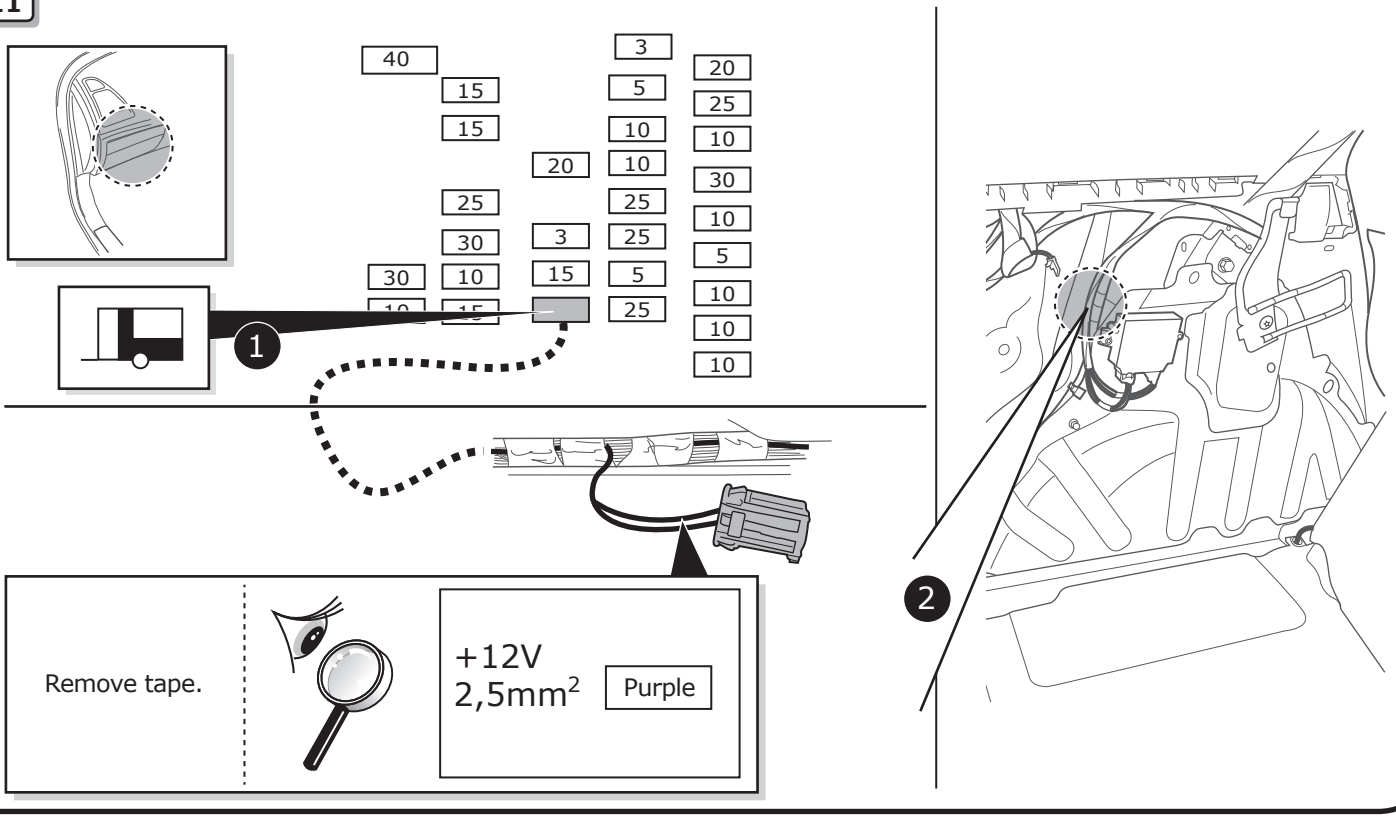

40
15
15
20
25
30
3
30
10
15
3
5
10
10
25
25
5
25
20
25
10
30
10
5
10
10
10
1
2
Remove tape.
+12V
2,5mm²
Purple

12

+12V
2,5mm² Purple

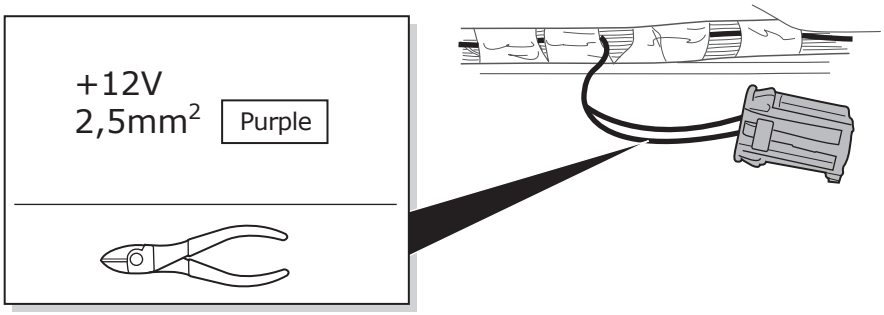


1

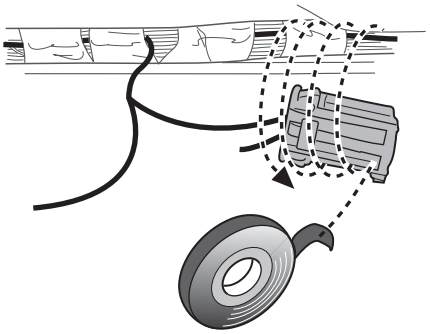


2


+12V
2,5mm² Purple



3





4




5

13

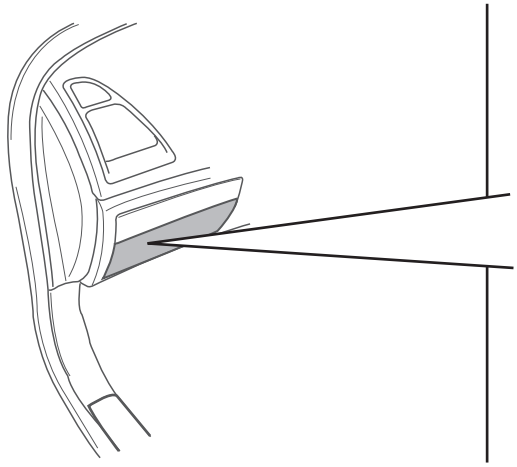


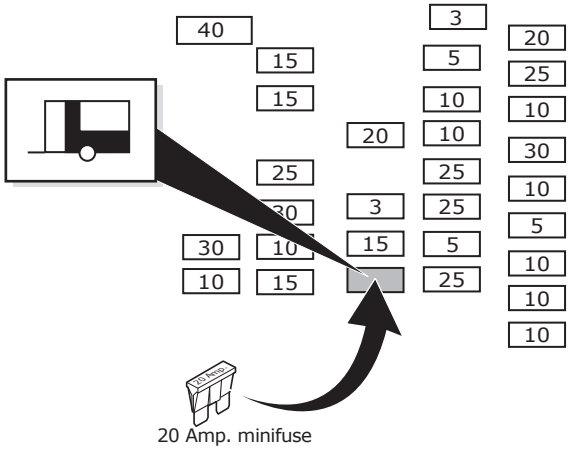

OPTION

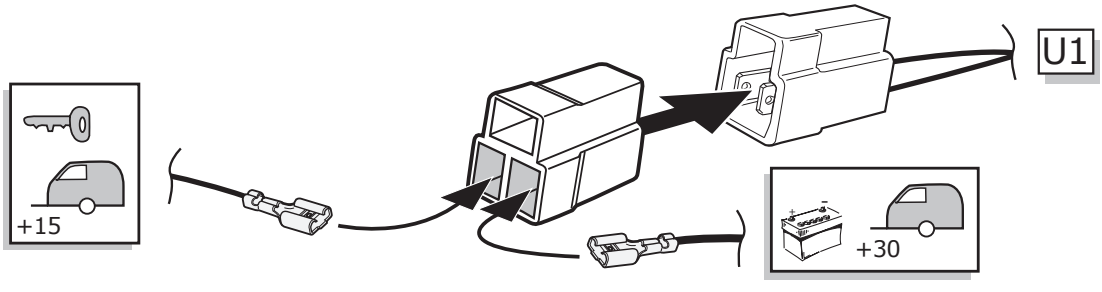

14

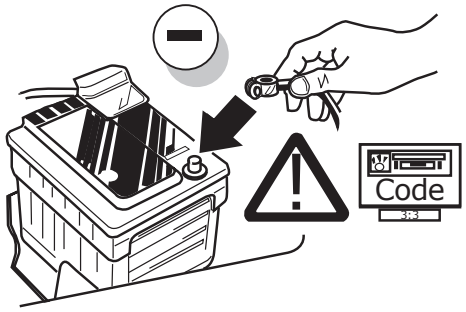


15

! TEST ALL THE CIRCUITS WITH A TEST DEVICE WITH THE CORRECT POWER LOAD FOR EACH FUNCTION. A TEST DEVICE WITH LED'S CANNOT BE USED FOR THIS PURPOSE.

INFO

REINSTALL TRIM.

16

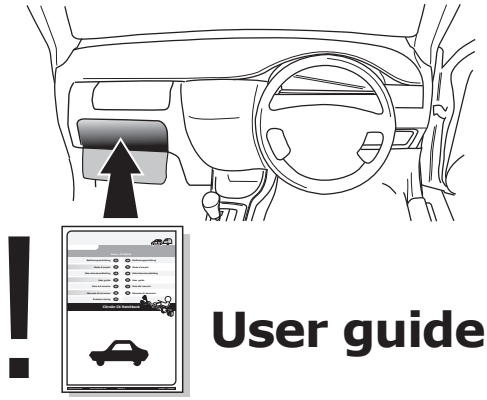


! **User guide**




INFO


SOCKET CONNECTION

DIN/ISO 11446	⇦	🚗≡	⏚1-8	⇨	-☼-	STOP	-☼-	Reverse	30+	15+	⏚10	—	⏚ 9
	1/L	2	3/31	4/R	5/58-R	6/54	7/58-L	8	9	10	11	12	13
Pmax	21W	2x21W		21W	52W	3x21W	52W	2x21W	180W/15Amp	180W/15Amp			
Colour	Yellow	Blue	White	Green	Brown	Red 1,00 mm²	Black	Black/ Red	Brown/ White	Red 2,50 mm²	White	-	White

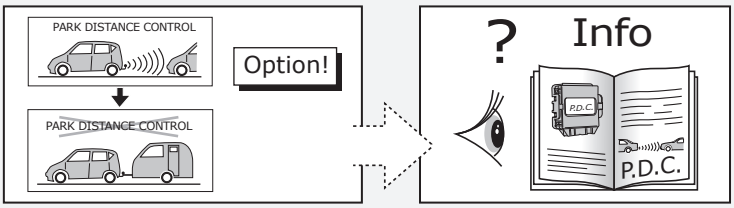

PARK DISTANCE CONTROL
PARK DISTANCE CONTROL
Option!
?
Info
P.D.C.


OEM PDC

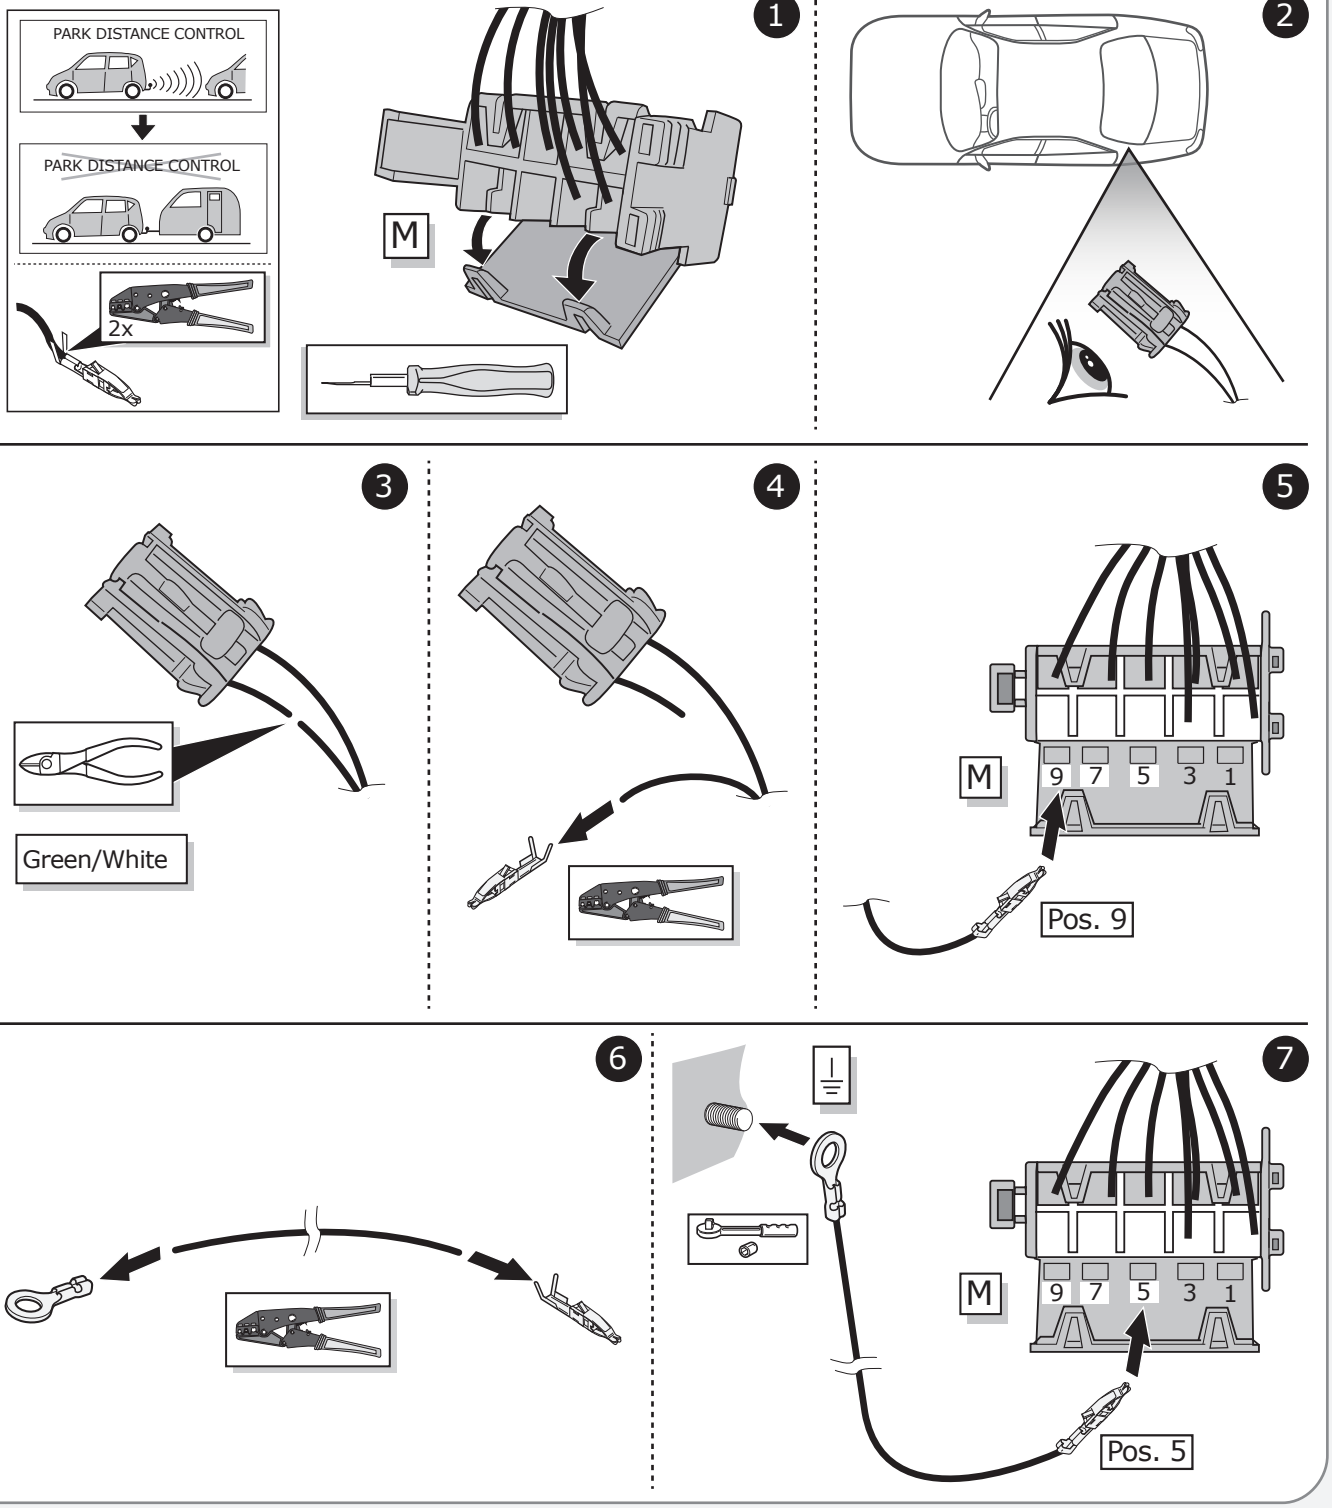
PARK DISTANCE CONTROL
PARK DISTANCE CONTROL
2x
1
M
2
3
Green/White
4
5
M
9 7 5 3 1
Pos. 9
6
7
M
9 7 5 3 1
Pos. 5

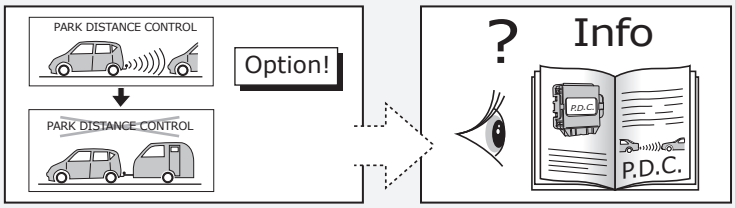


AFTER MARKET PDC

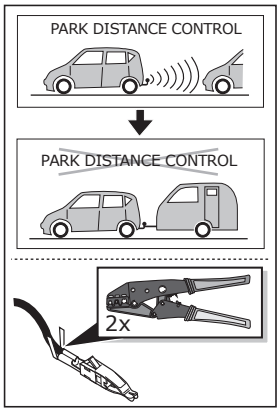


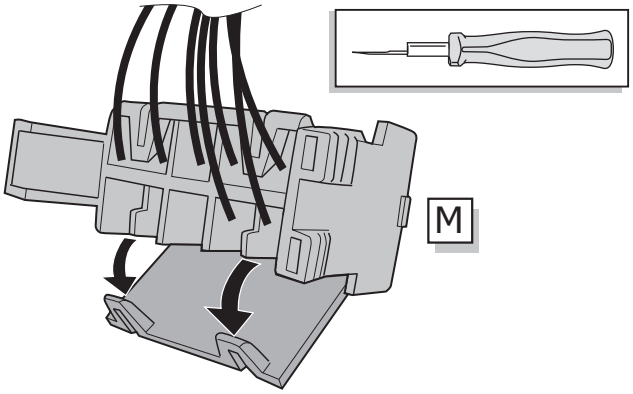


Option A

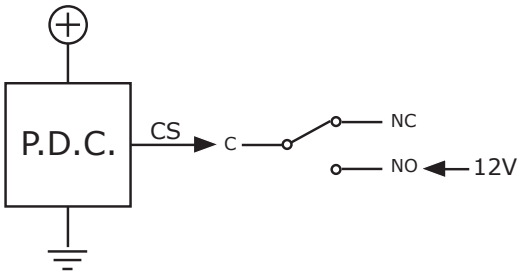

Option B

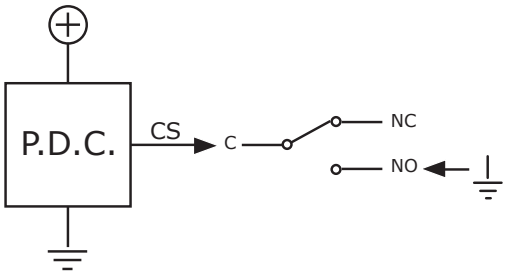

Option C

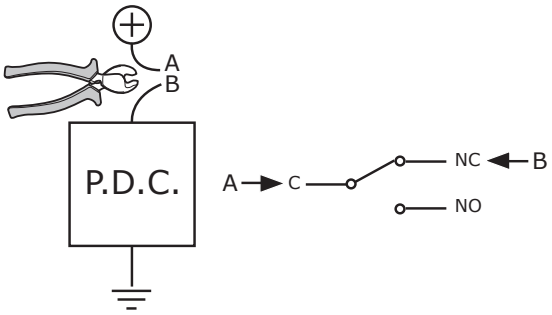

9 = C
5 = NO
7 = NC

