





Skoda Yeti 2010-

Partnr.: SK-015-B2U

- Fitting instructions electric wiring kit tow bar with 12-N socket up to DIN/ISO Norm 1724.
- We would expressly point out that assembly not carried out properly by a competent installer will result in cancellation of any right to damage compensation, in particular those arising by virtue of the product liability act.
- Contents of these kits and their fitting manuals are subject to alteration without notice, please ensure that these instructions are read and fully understood before commencing installation.
- Do not overload circuits; the maximum loads per connection are detailed in this manual.
- Attention! Before Installation, please read this manual carefully and inform your customer to consult the vehicle owners manual to check for any vehicle modifications required before towing.
- In the event of functional problems, troubleshooting must be limited to about 0.5 hours, contact the technical support:
t.skinner@ecs-electronics.com / 07440 202 052.

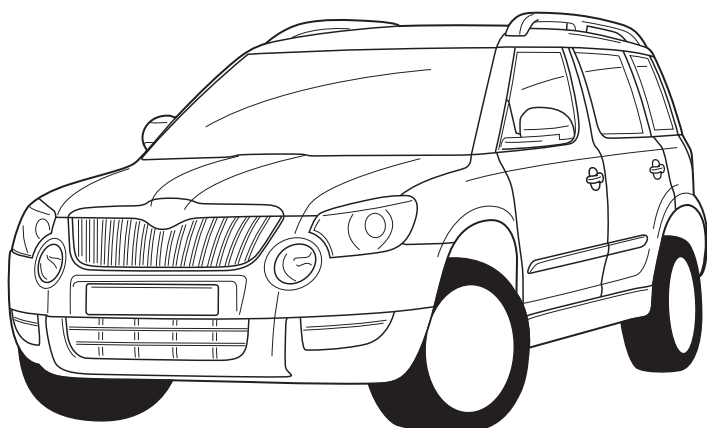


Part list

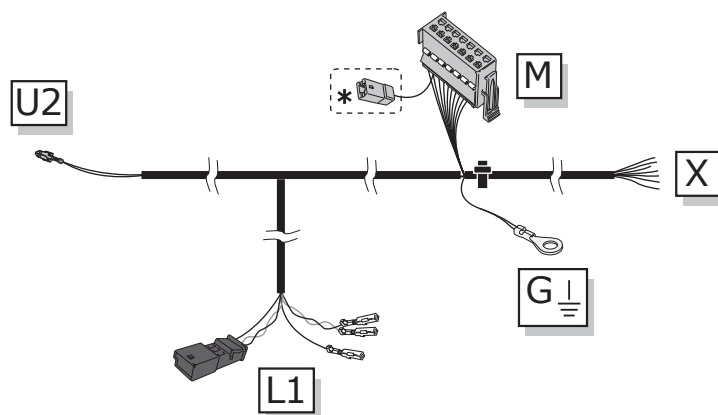

M


U2




U1



2x

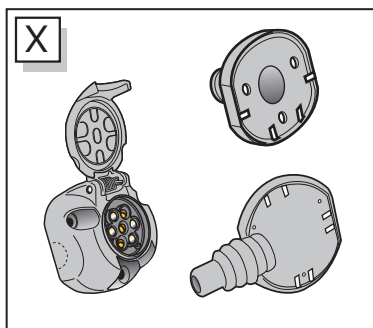

X



15x




T


* Reverse signal preparation



Pag. 13



3x




1x




1x






3x




1x




10x

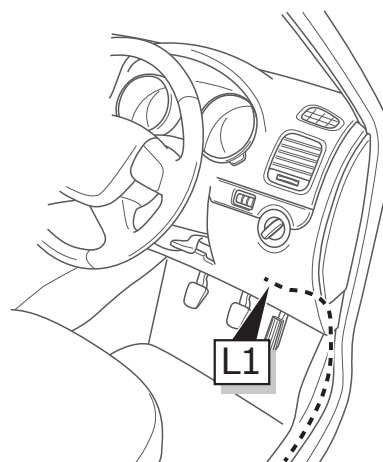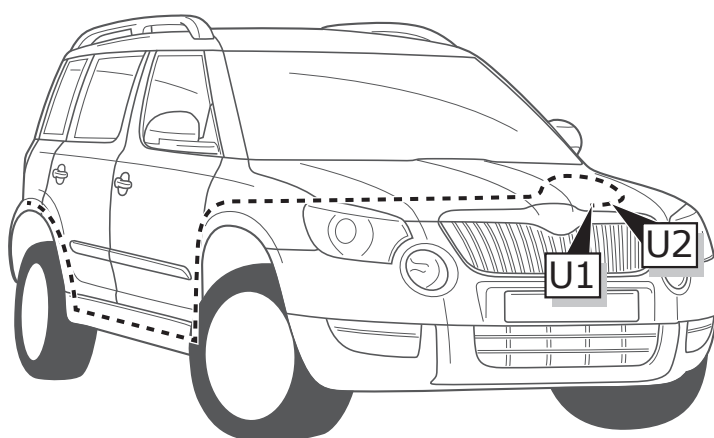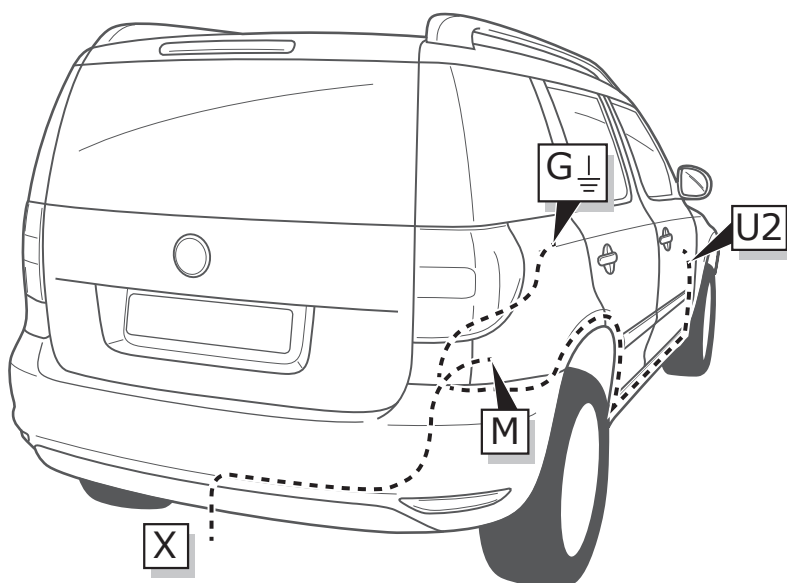


1

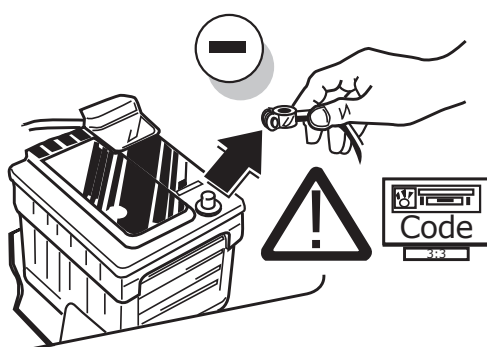


2

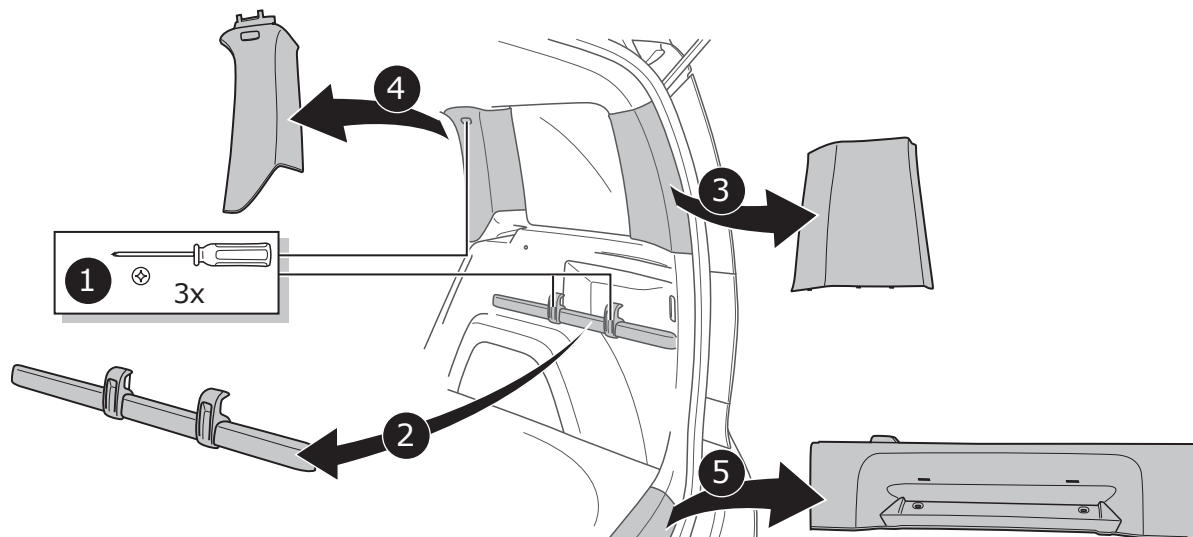


3

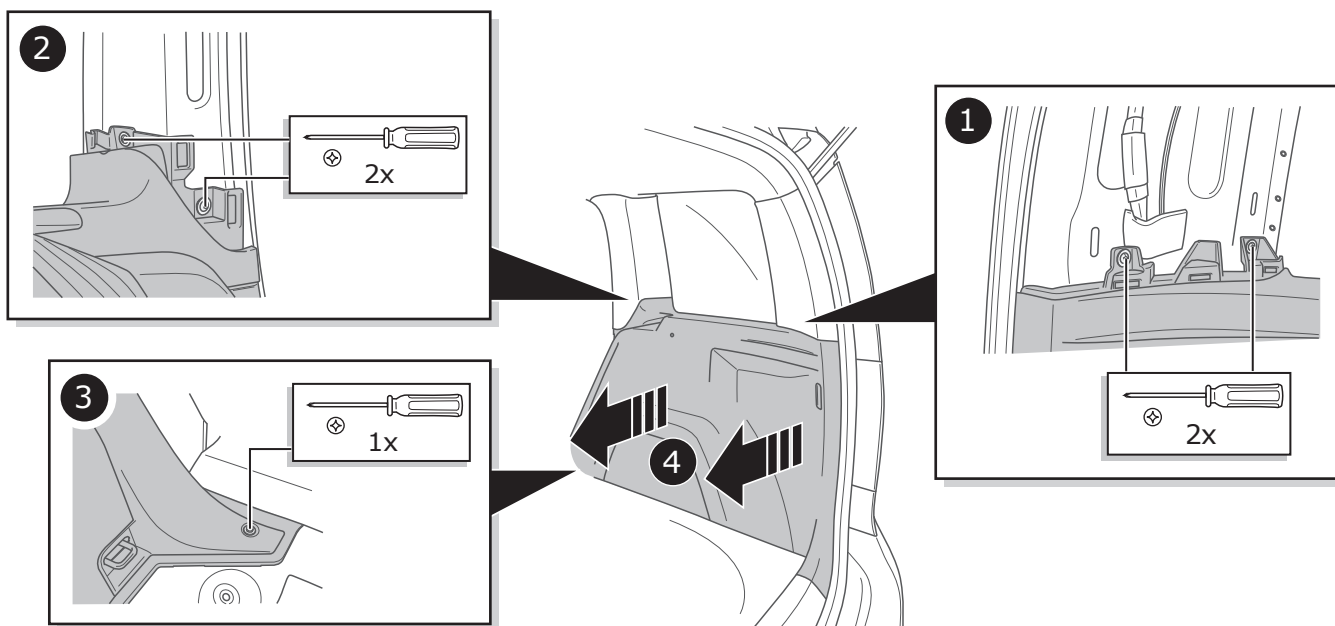


4

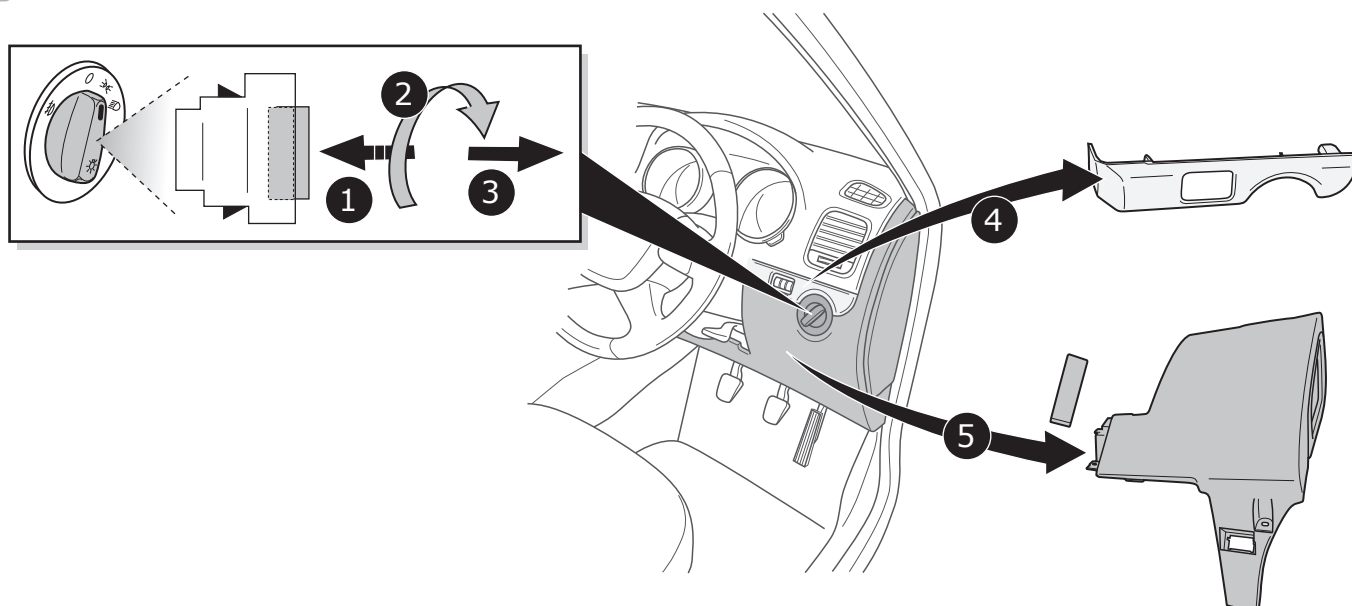

5

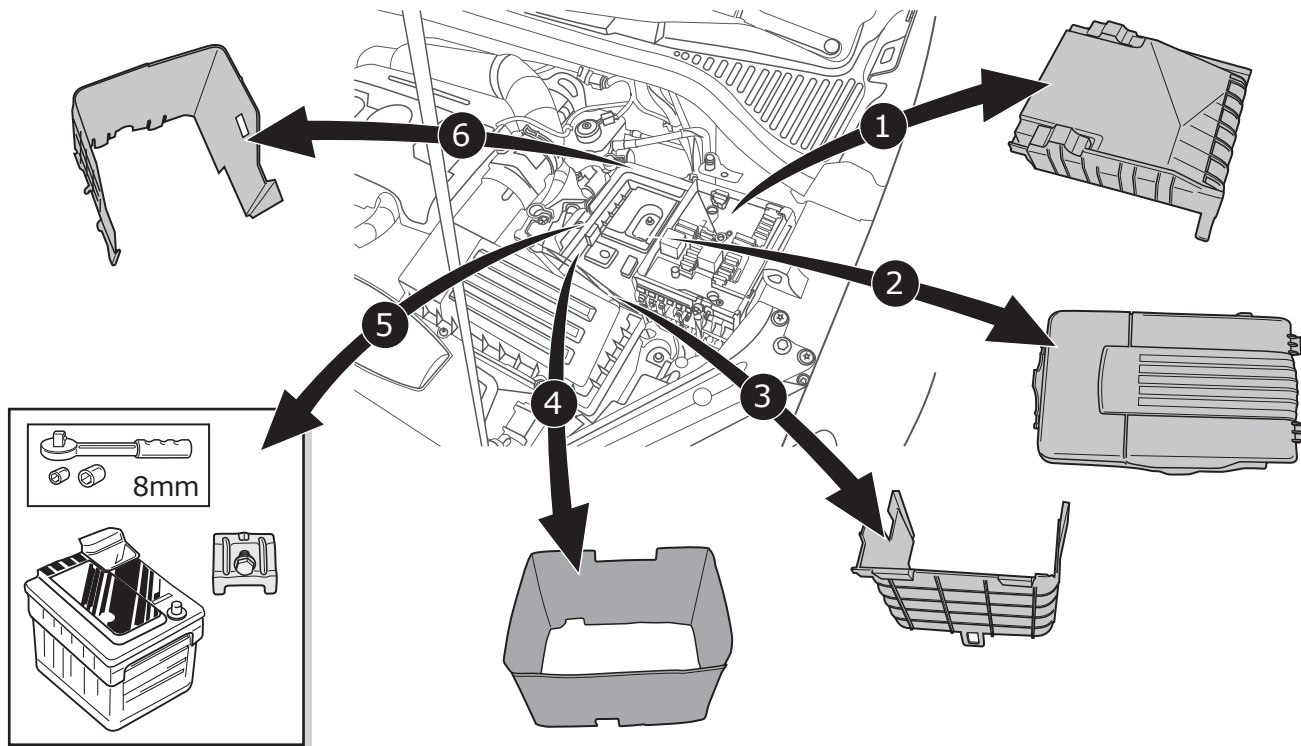


6

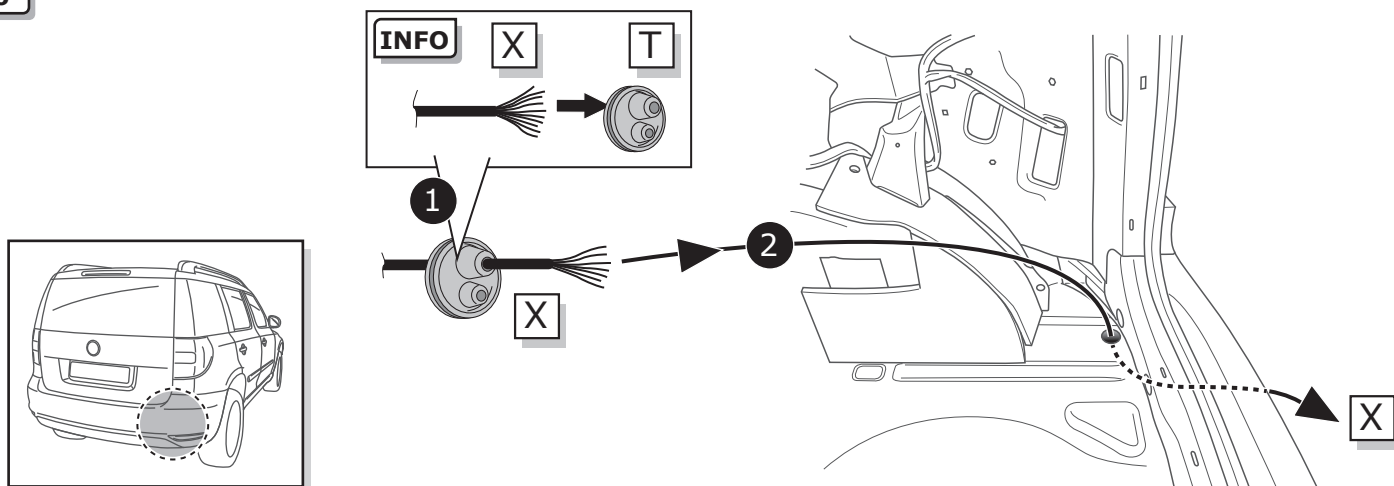


A


Option 1

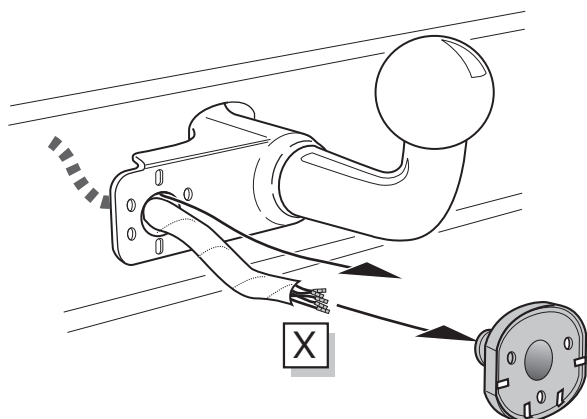

Option 2

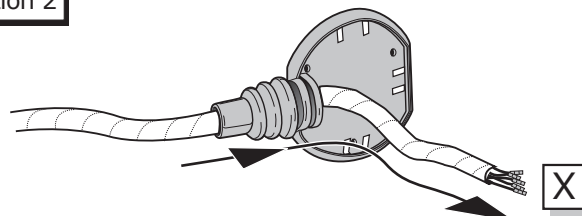



Option 3

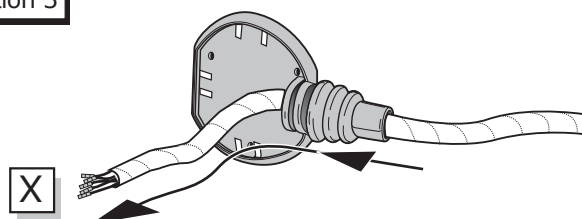

SOCKET CONNECTION

B


Option 1

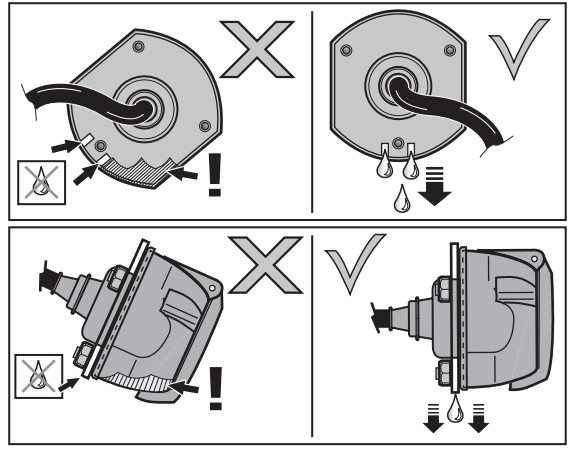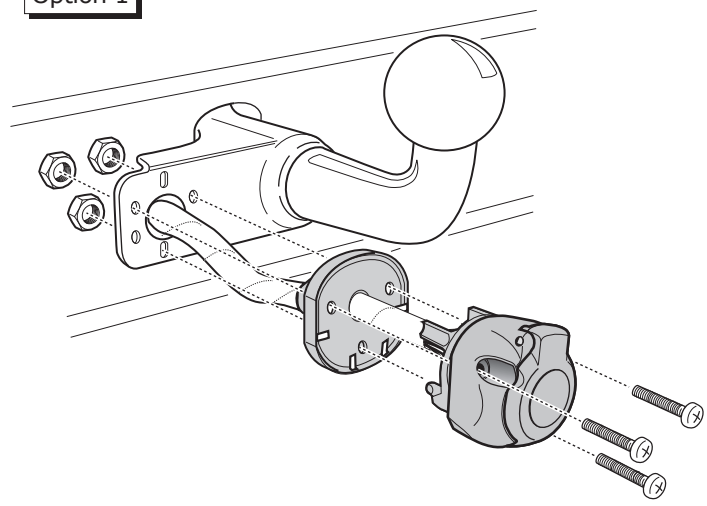


C

Option 2


1



2




3

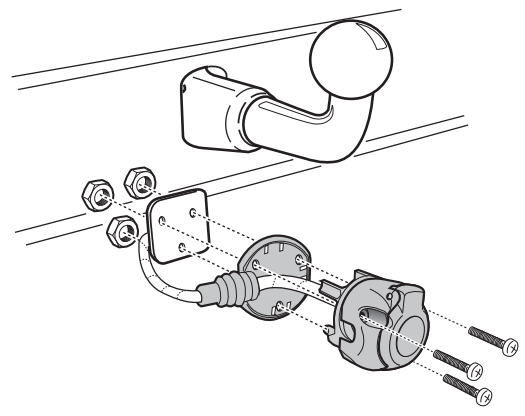


D

Option 3


1





2





3

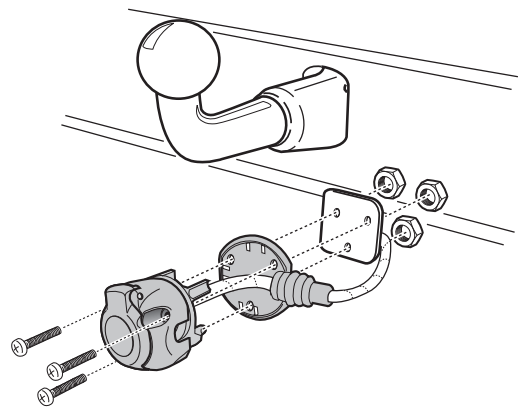



7

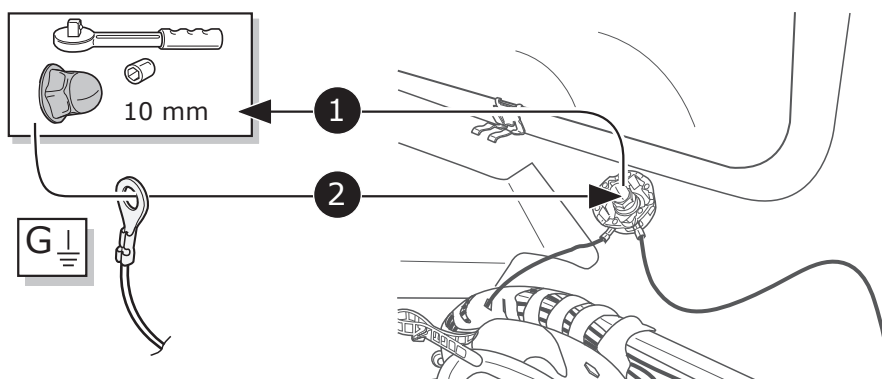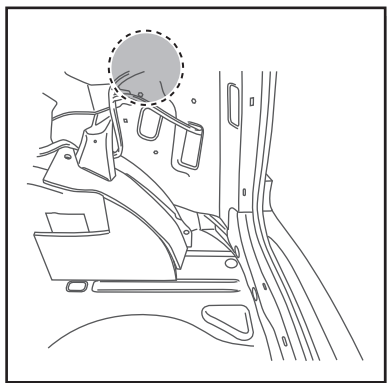


8

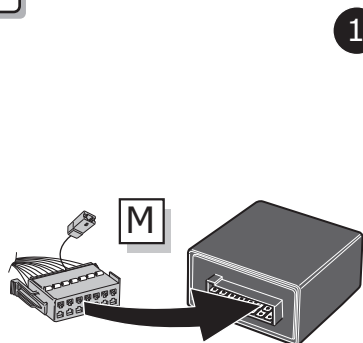

2




3

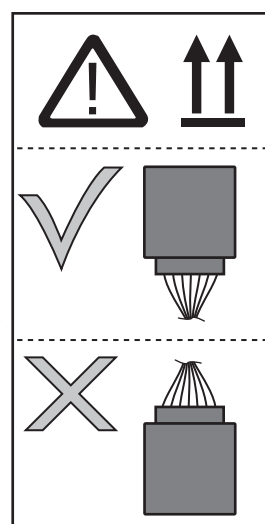


4

9

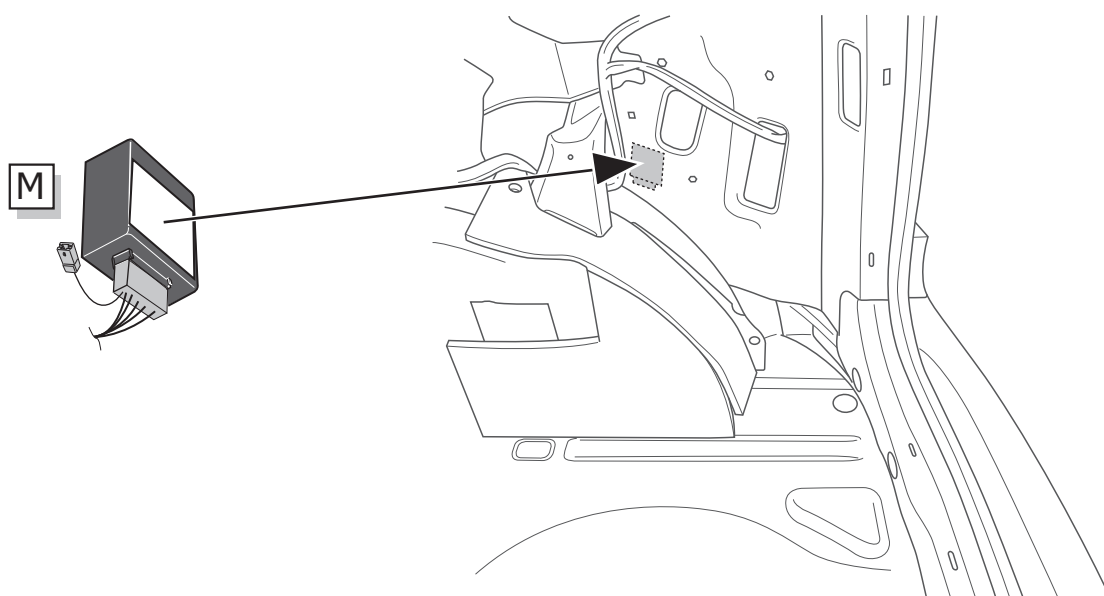


10

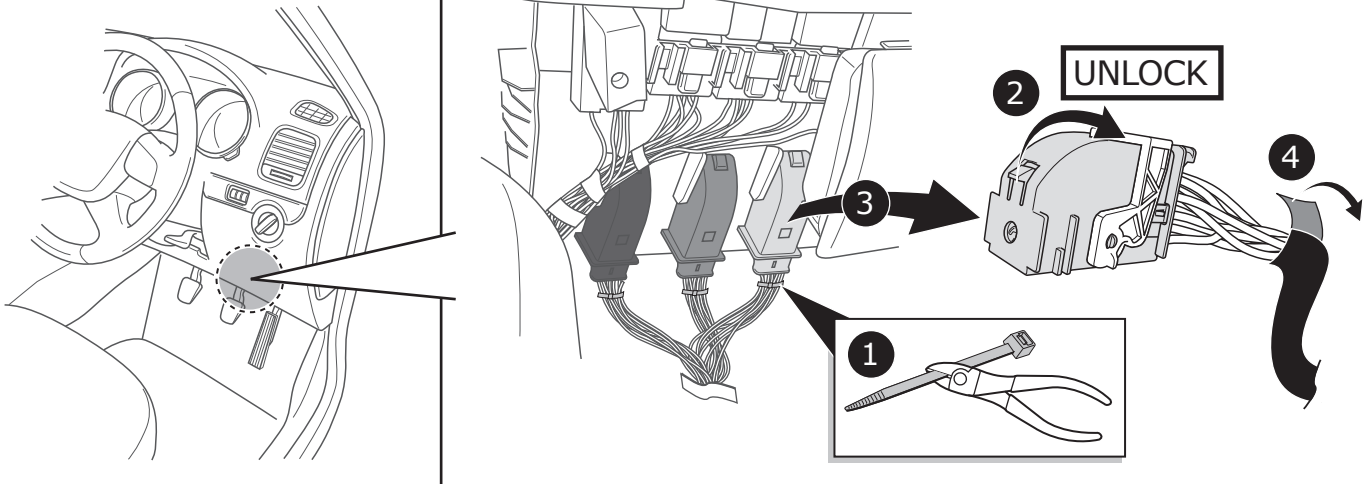


11


1

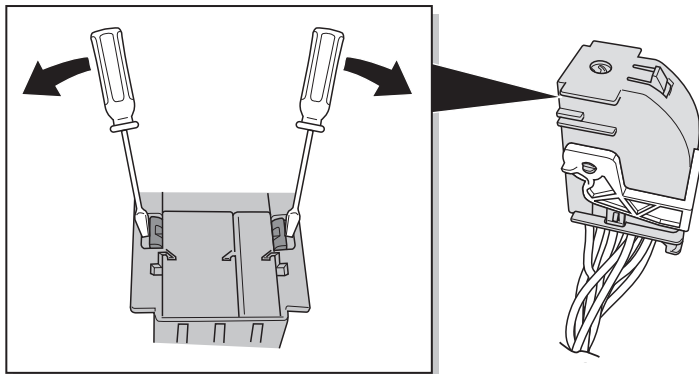


2


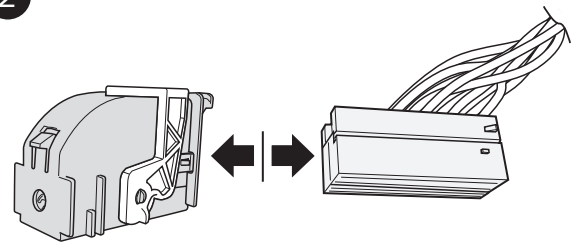


3

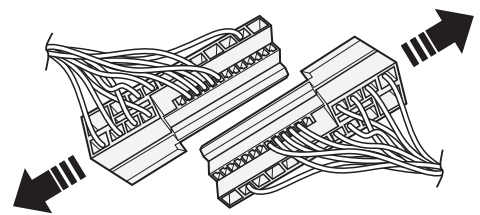


12

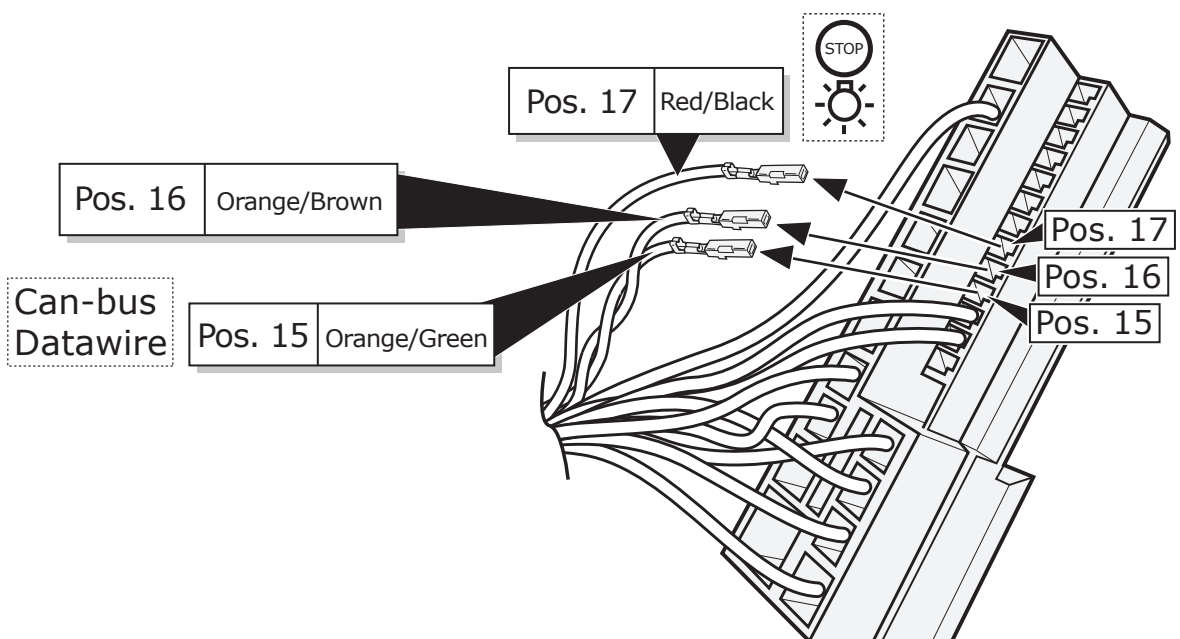

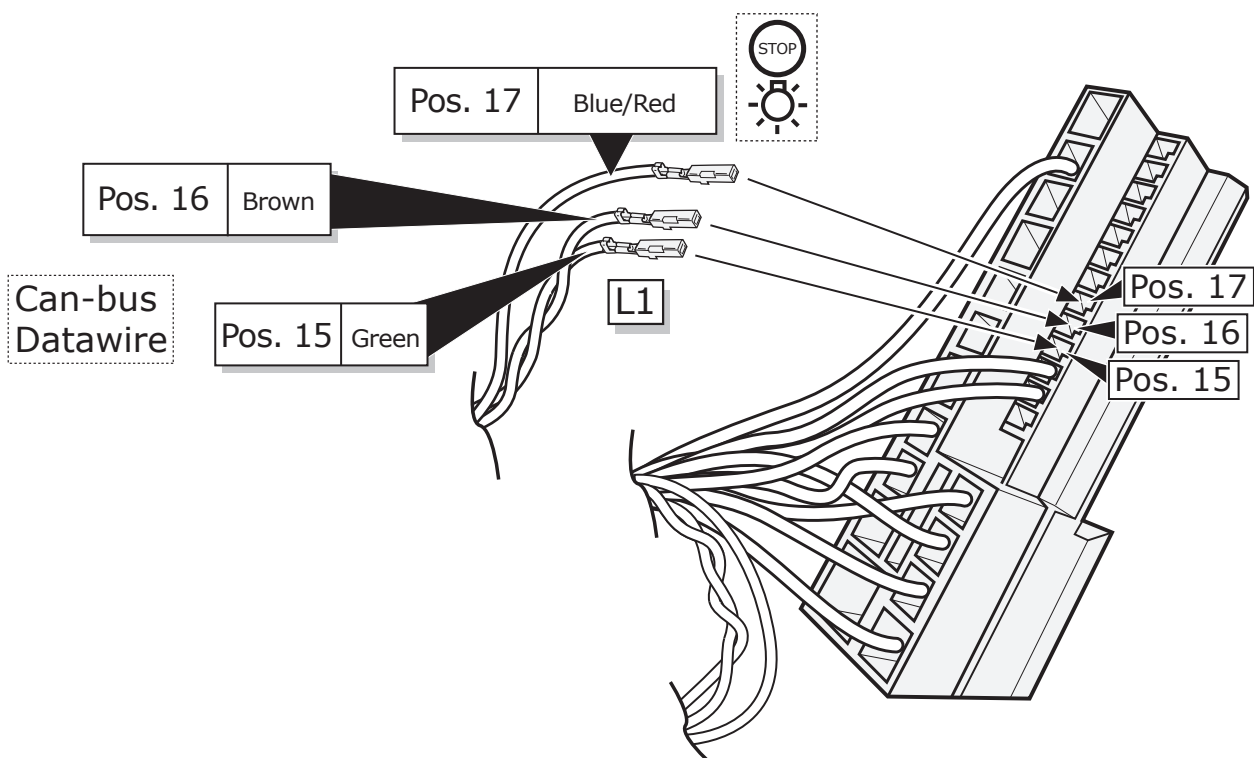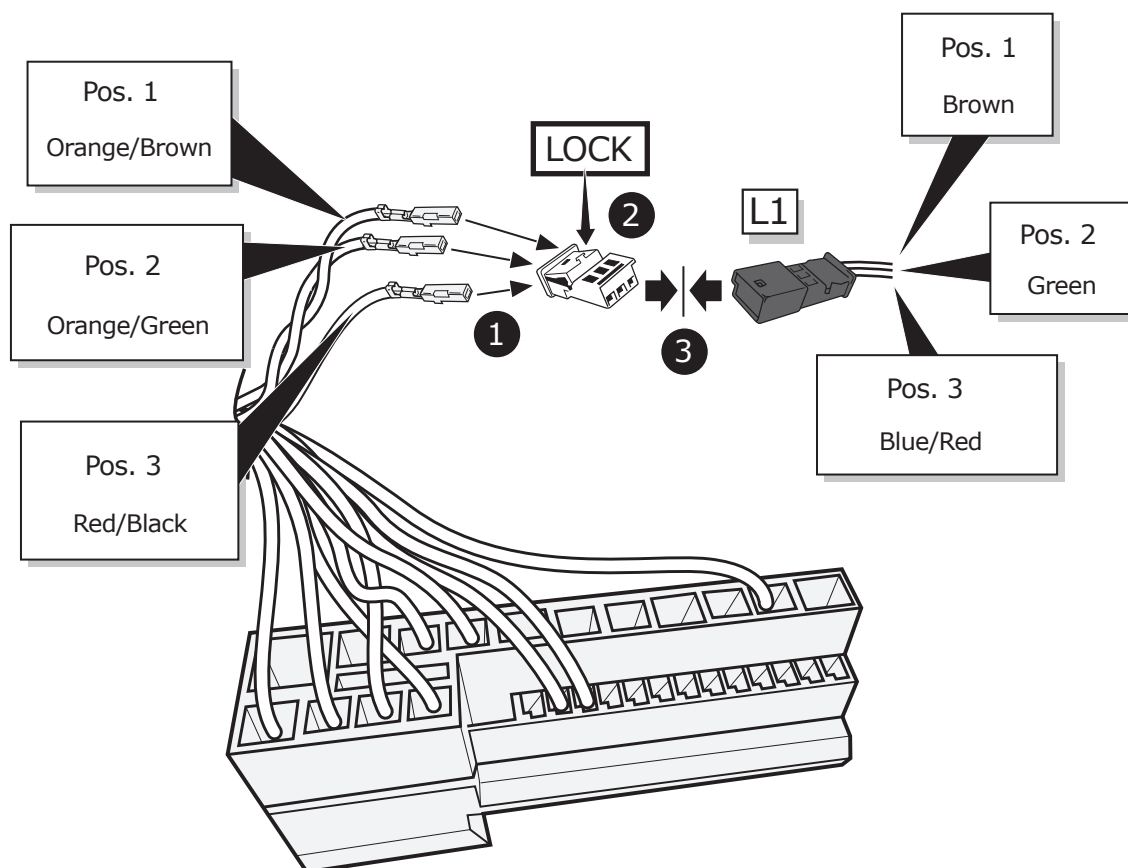


15



1

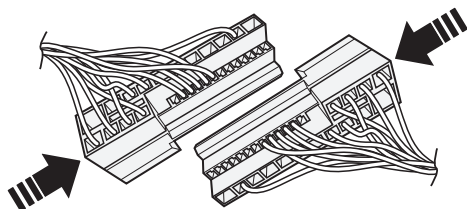




2

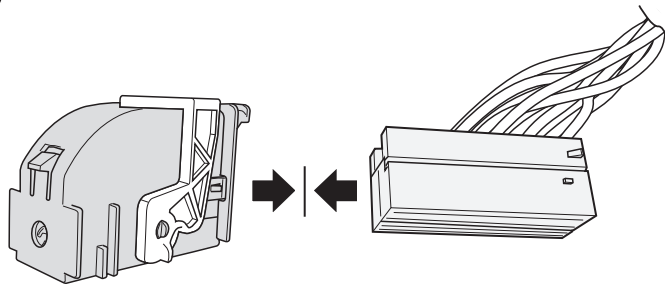


16

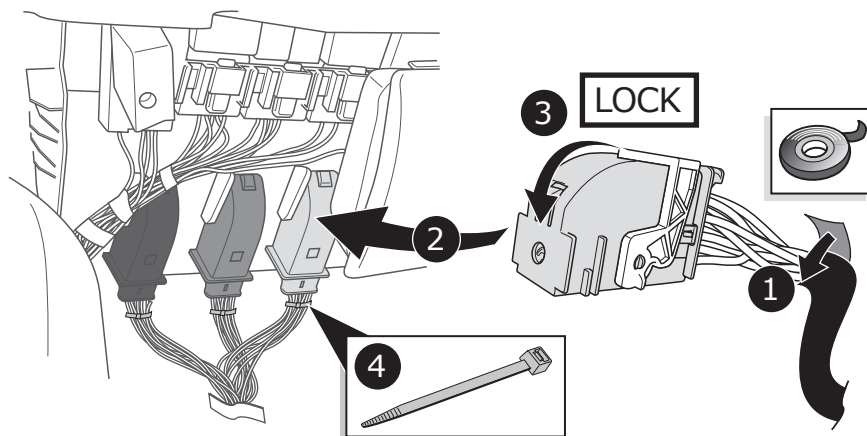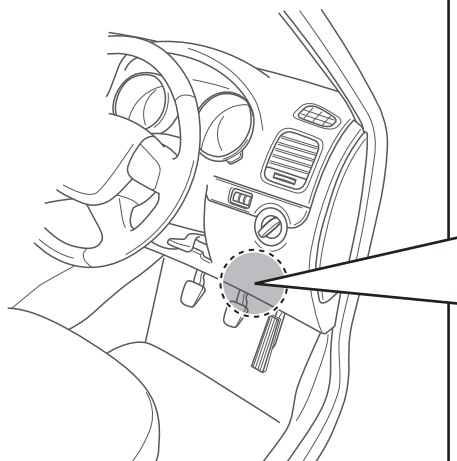


17

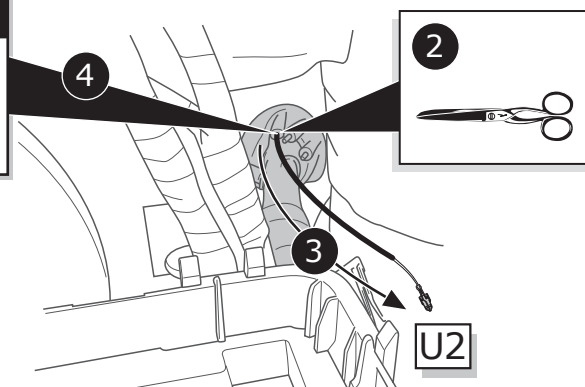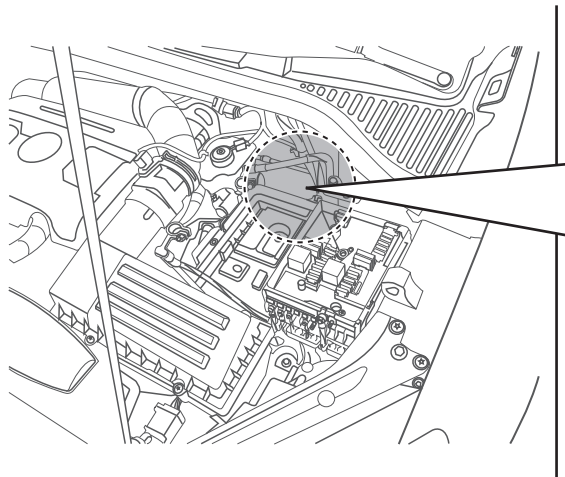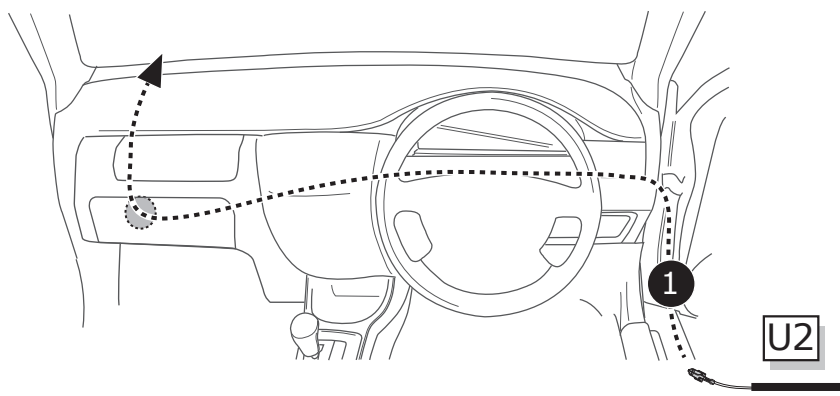


18

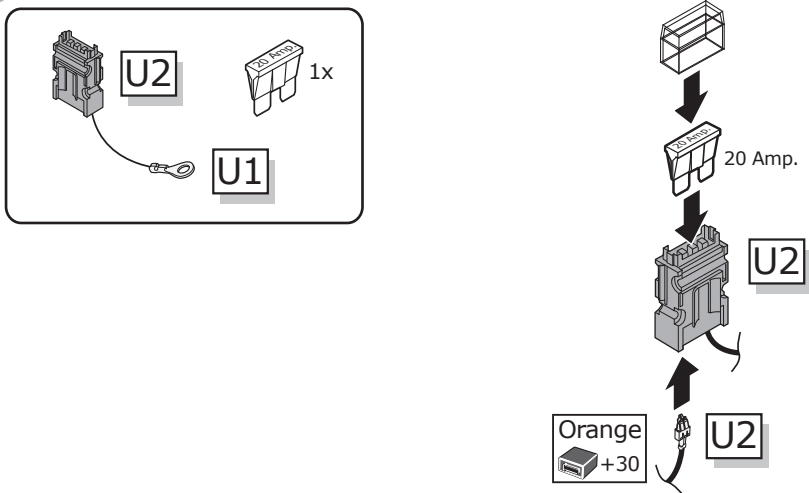

19

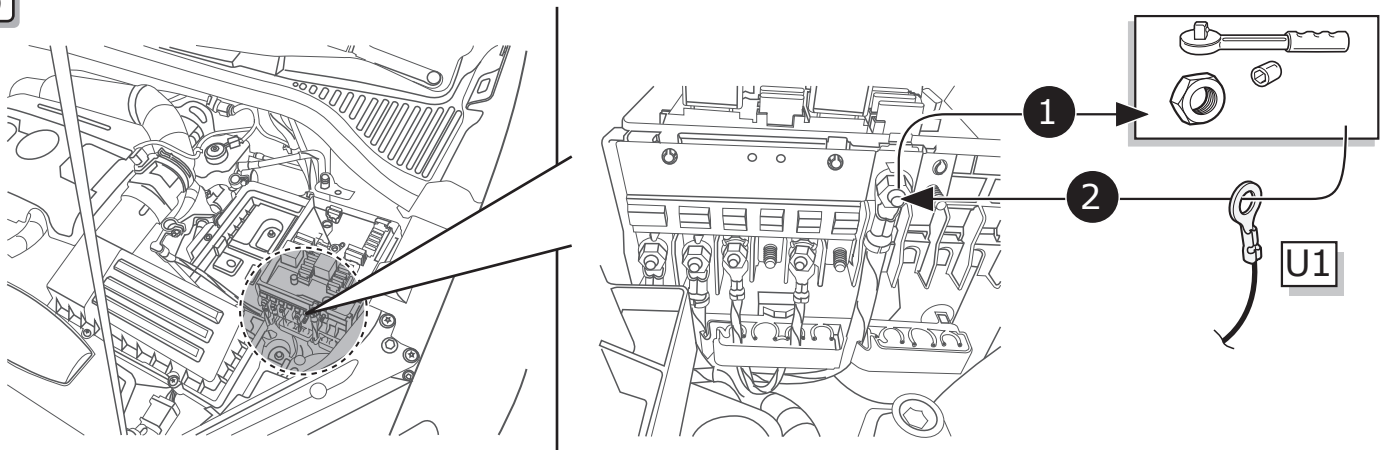

20

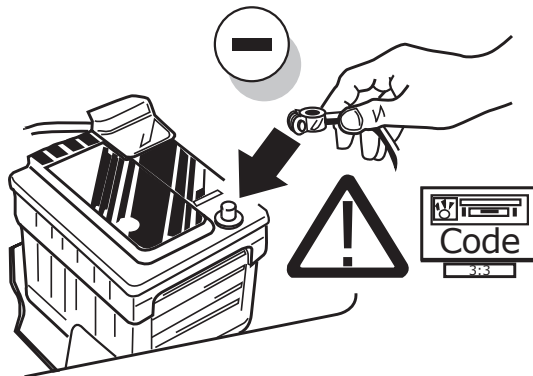


21

A VAG Service Tester must be used to code the vehicle's Gateway with the additional function for the towing hitch at the dealer.

! TEST ALL THE CIRCUITS WITH A TEST DEVICE WITH THE CORRECT POWER LOAD FOR EACH FUNCTION. A TEST DEVICE WITH LED'S CANNOT BE USED FOR THIS PURPOSE.

INFO

REINSTALL TRIM.

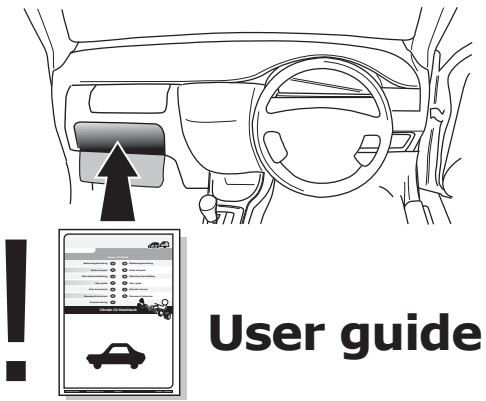


INFO

SOCKET CONNECTION


DIN/ISO 1724							
	1/L	2	3/31	4/R	5/58-R	6/54	7/58-L
Pmax	21W	21W		21W	42W	3x21W	42W
Colour	Black/ White	Blue	Brown	Black/ Green	Grey/ Red	Black/ Red	Grey/ Black

Reverse signal preparation


A

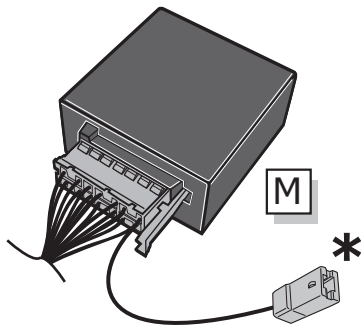


1

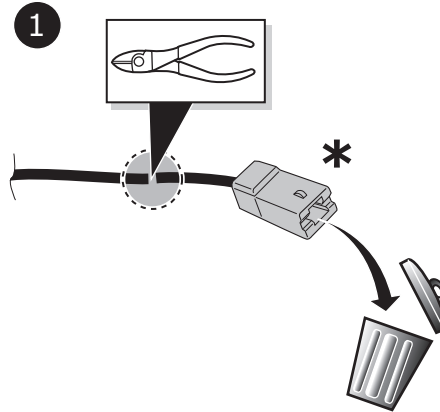

2



B

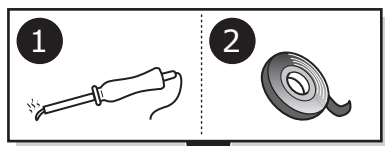

⚠ MAX = 21W

