



! INFO !

Do not charge the battery of the towing vehicle and/or towed vehicle directly via the socket.

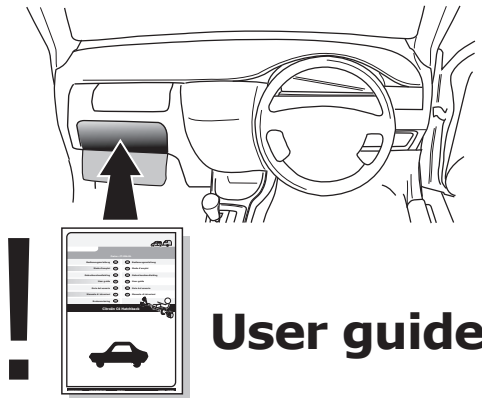

User guide

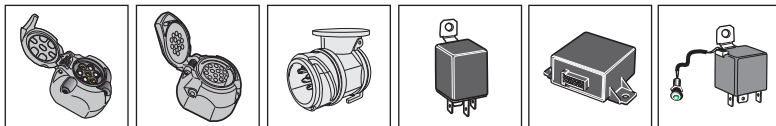


SPARE PARTS

www.ecs-electronicsuk.co.uk




Partnr.: HY-068-DHU









User Guide




**Hyundai Santa Fe 2012-
Hyundai Grand Santa Fe**

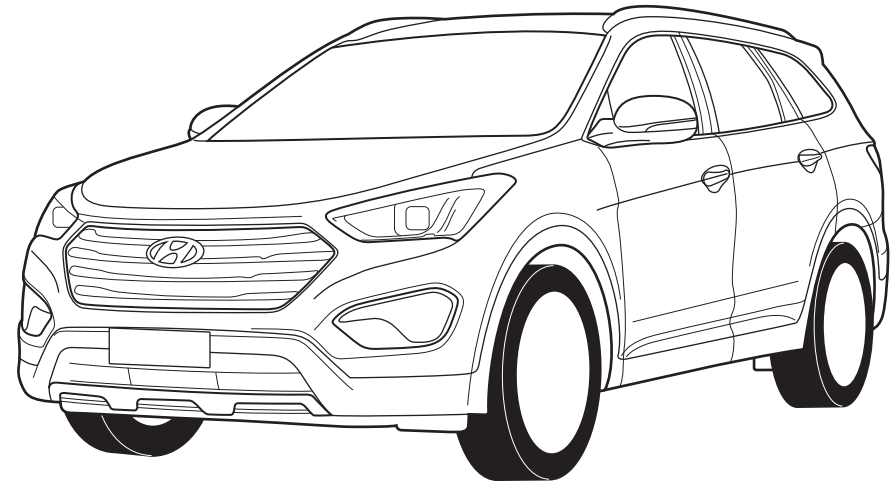


INFO

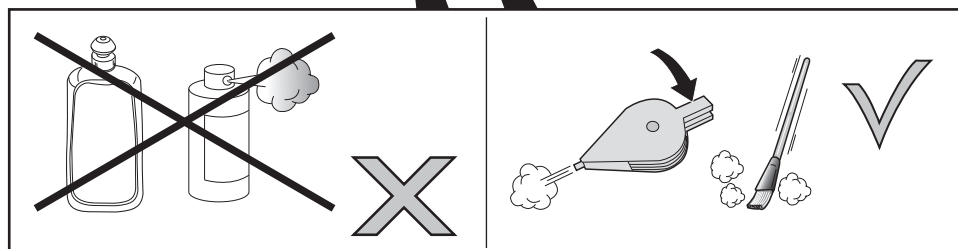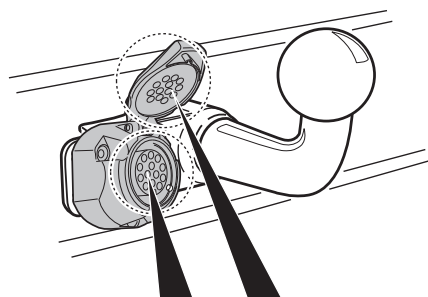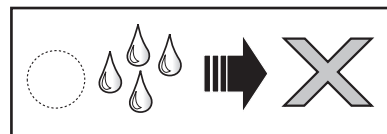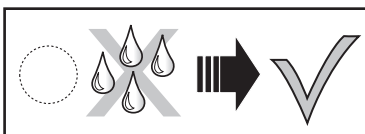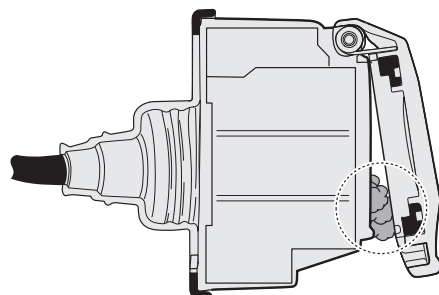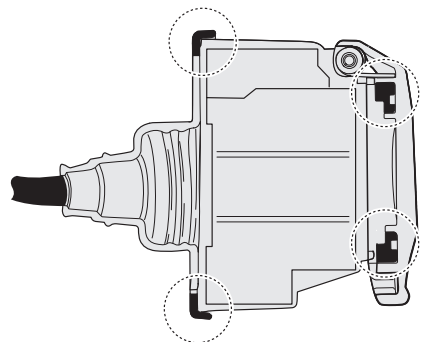

CHANGING THE FUSE

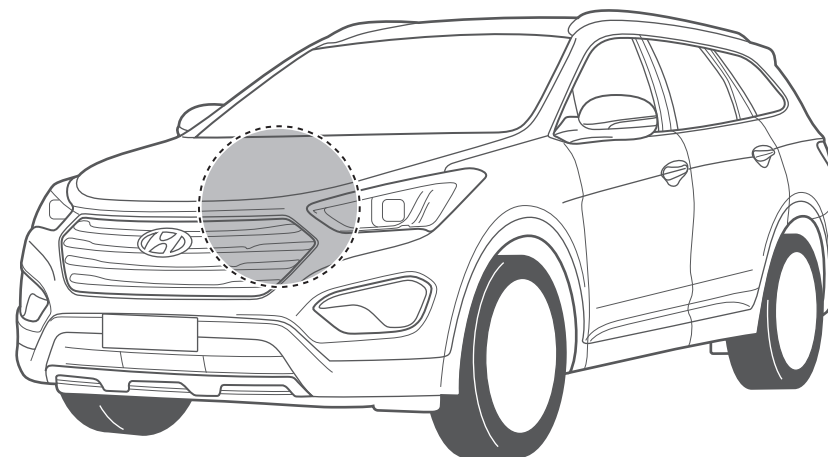


15 Amp.



Brown/White



20 Amp.



Orange

SOCKET CONNECTION


DIN/ISO 11446	↩	🚗	1-8	↪	☀	STOP	☀	Reverson	30+ 15+	15+	10	—	9
	1/L	2	3/31	4/R	5/58-R	6/54	7/58-L	8	9	10	11	12	13
Pmax	21W	2x21W		21W	52W	3x21W	52W	2x21W	180W/15Amp	180W/15Amp			
Colour	Yellow	Blue	White	Green	Brown	Red 1,00 mm²	Black	Black/ Red	Brown/ White	Red 2,50 mm²	White	-	White



In a coupled trailer with working fog lamp, the fog lamp of the vehicle will be switched off, if applicable.







The flashing lights on the trailer are monitored. If one of the indicators of the trailer breaks down, a buzzer will be audible and/or a visual signal will be visible on the dashboard. Check the flashing lights on the trailer.




The wiring kit has a possibility to switch off any Park Distance Control in the case of a coupled trailer.





INFO : Ring.

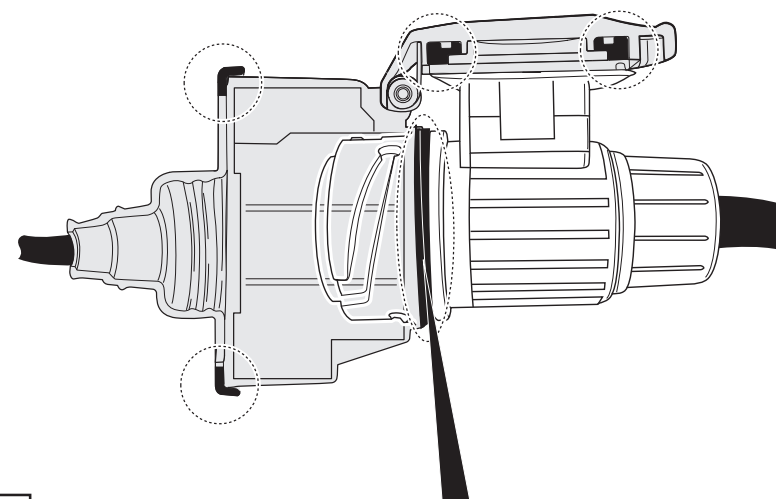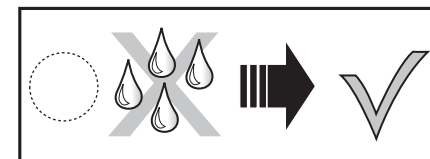





INFO

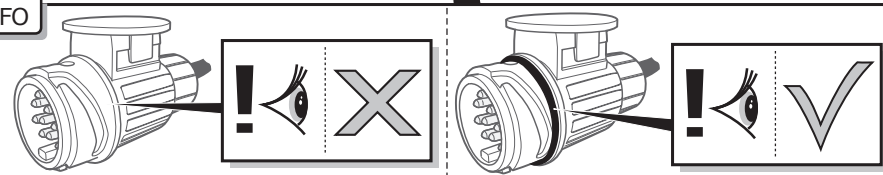

INFO : Adapt.

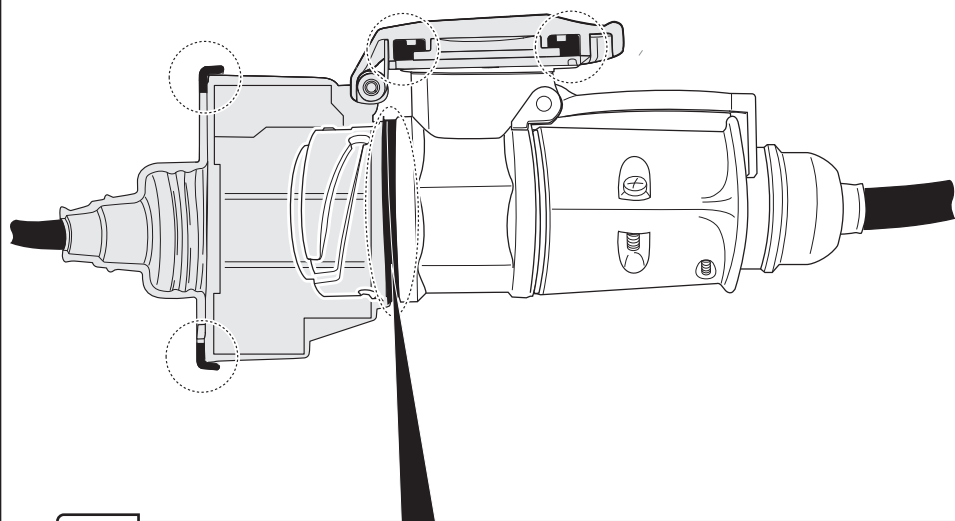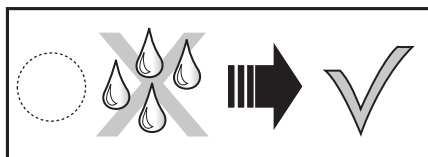

INFO



INFO : Storage

